
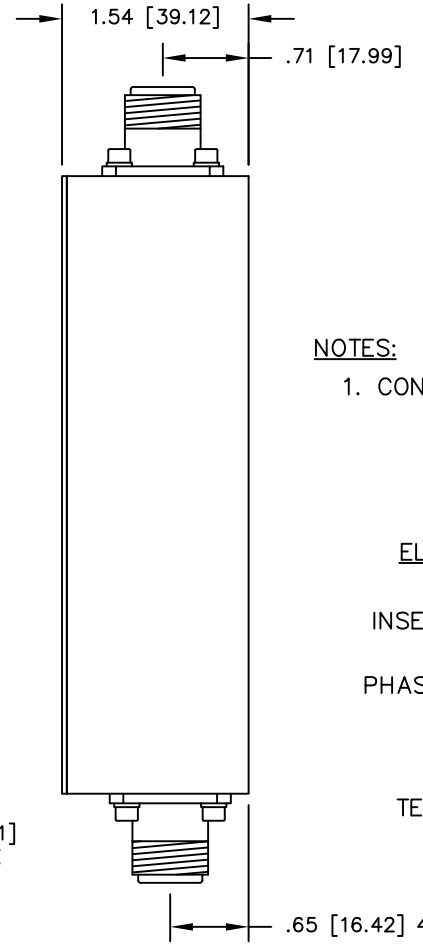


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1453	A	INITIAL RELEASE	DG	6-08

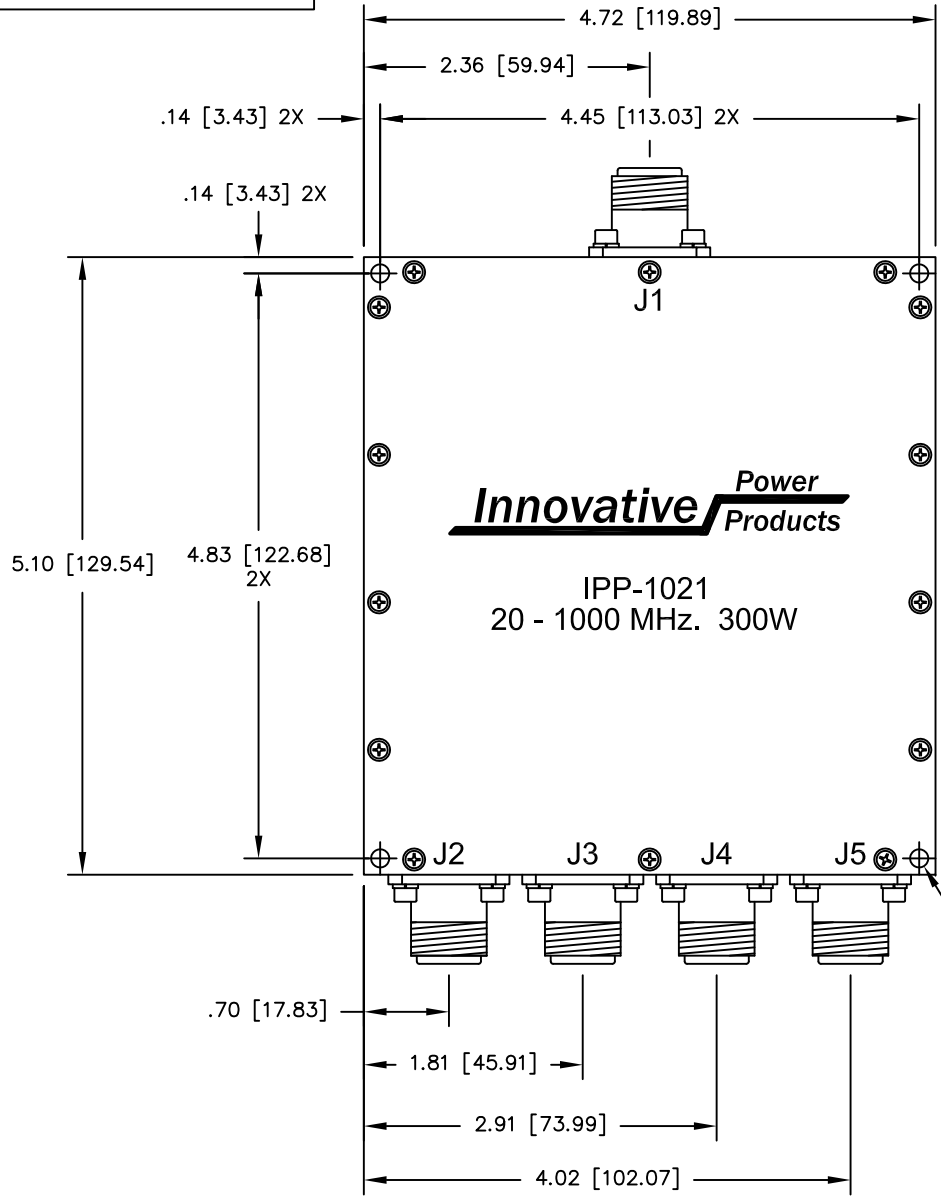

NOTES:

1. CONNECTORS: J1 - J5 TYPE "N" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY: 20 - 1000 MHz.
 INSERTION LOSS: < 0.75 dB
 VSWR: < 1.25:1
 PHASE BALANCE: ±5°
 POWER: 300 WATT
 ISOLATION: >12dB 20-125 MHz.
 >15dB 125-1000 MHz.
 TEMPERATURE: -55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN DG	DATE 5-08	Innovative Power Products		
	ENG TJD	DATE 5-08			
FINISH CHEM FILM CLEAR IRRIDITE	MANUF TP	DATE 5-08	TITLE 4 - WAY 20 - 1000 MHz 300 WATT		
	CAGE CODE: 437R2		SIZE B	P/N IPP-1021	REV. A
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1			