


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
2737	A	INITIAL RELEASE	TJD	10-10
2787	B	SEE DAR	TJD	11-10
2832	C	SEE DAR	TJD	12-10

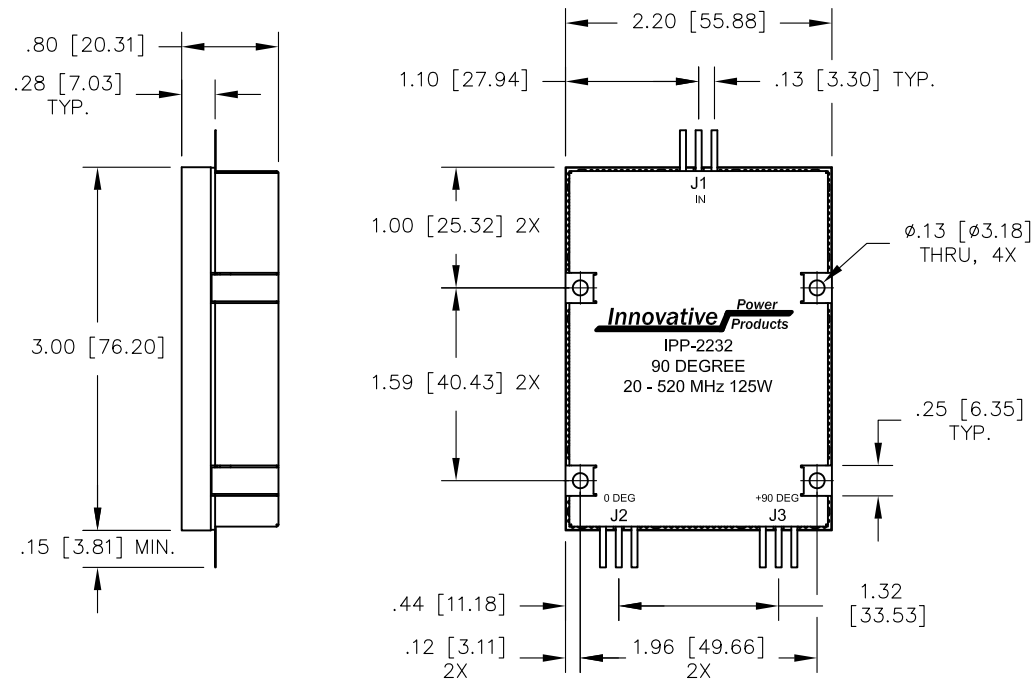

NOTES:

- LEADS 99.99% PURE SILVER
.050 [1.270] WIDE X .005 [.127] THICK.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 - 520 MHz.
INSERTION LOSS:	< 0.80 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±10°
AMPLITUDE BALANCE:	±0.3 dB
POWER:	125 WATT
ISOLATION:	>16 dB

MATERIAL AL. ALLOY 6061-T651	DWN DG	DATE 5-10	Innovative Power Products		
	ENG TJD	DATE 5-10			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF	DATE	TITLE OUTLINE, COUP., 90°, 20 - 520 MHz. 125W		
	CAGE CODE: 437R2		SIZE B	P/N	IPP-2232
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET 1 OF 1	SCALE 1:1			