


Isolation

MEM LOG 10dB/ REF 0 dB

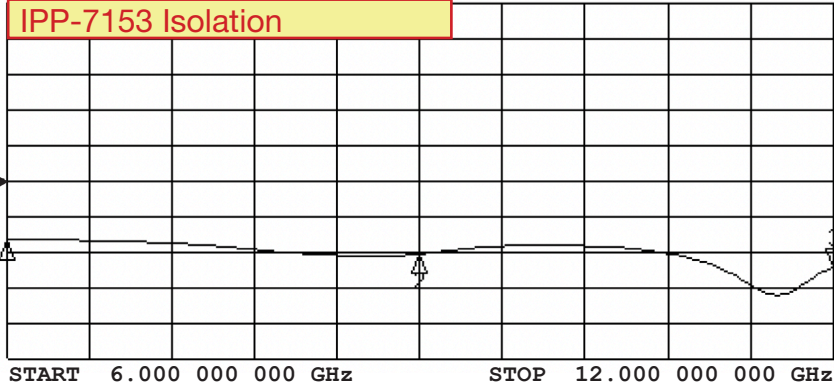


Markers

- 1: -16.237 dB
6.00000 GHz
- 2: -20.328 dB
9.00000 GHz
- 3: -24.228 dB
12.00000 GHz

Phase Balance

S21/M PHA 6°/ REF -90°

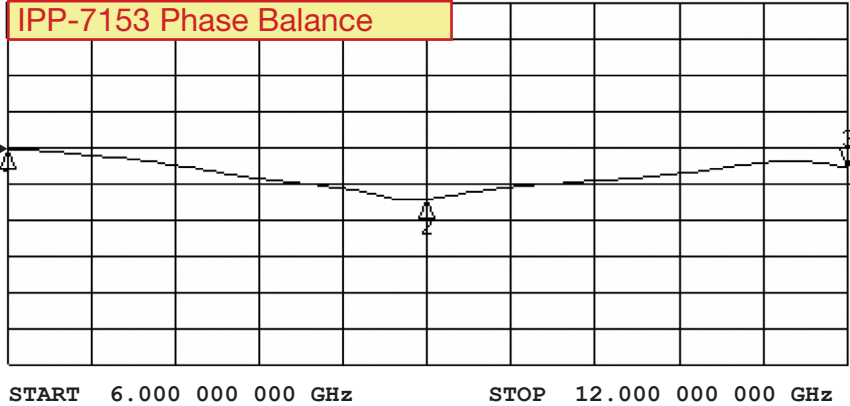


Markers

- 1: -84.321°
6.00000 GHz
- 2: -92.590°
9.00000 GHz
- 3: -87.479°
12.00000 GHz

VSWR

S11 LOG 10 dB/ REF 0 dB

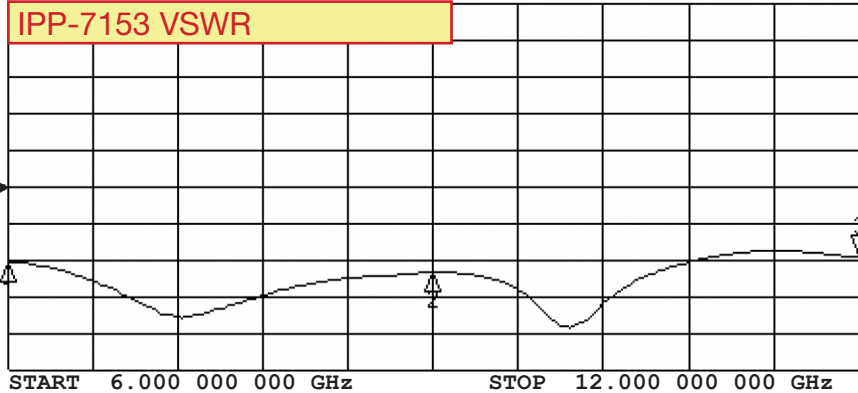


Markers

- 1: -20.263 dB
6.00000 GHz
- 2: -23.073 dB
9.00000 GHz
- 3: -18.816 dB
12.00000 GHz

Amplitude Balance

S21&M LOG .7dB/ REF -3dB

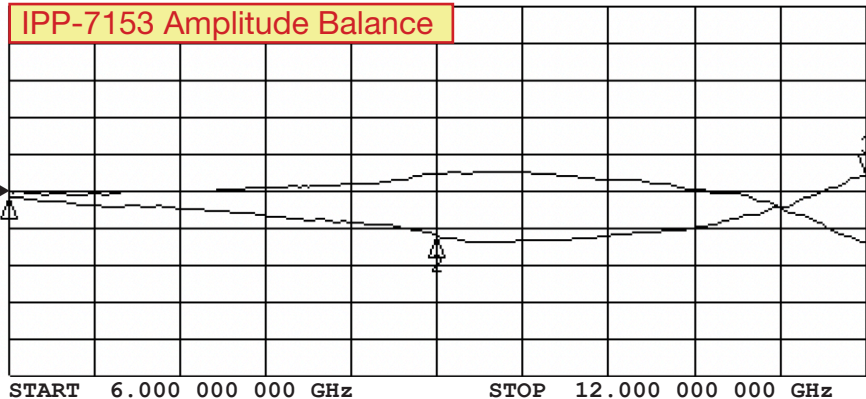

Markers

- 1: -3.1390 dB
6.00000 GHz
- 2: -3.8620 dB
9.00000 GHz
- 3: -2.7140 dB
12.00000 GHz