


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1027	A	INITIAL RELEASE	TJD	10-05
1159	B	REMOVE RIGHT ANGLE CONNECTOR	TJD	7-05

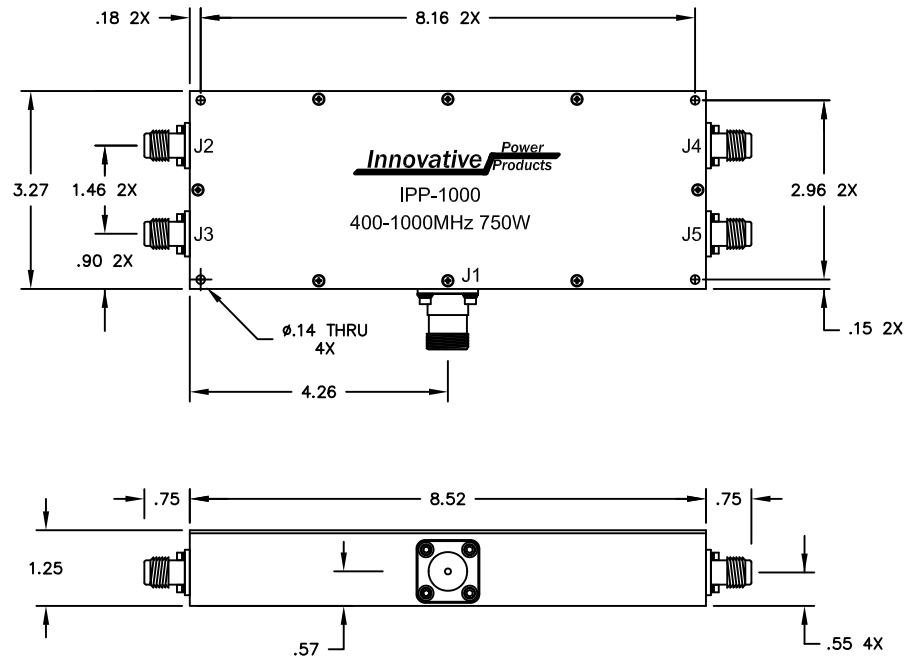

NOTES

- CONNECTOR J1: TYPE SC-F  
CONNECTORS J2 - 4: TYPE TNC-F

ELECTRICAL SPECIFICATIONS

FREQUENCY: 400 - 1000 MHz.  
 INSERTION LOSS: < 0.4dB  
 VSWR: < 1.30:1  
 PHASE BALANCE: < 5°  
 ISOLATION: > 10dB  
 AMPLITUDE BALANCE: < 0.2dB  
 POWER: 750 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	10/05	<b>Innovative Power Products</b>	
	6061-T651	ENG	TJD	DATE	10/05		
FINISH	CHEM FILM	MANUF	TP	DATE	10/05		TITLE
	CLEAR IRRIDITE	CAGE CODE: 437R2			400-1000 MHz., 750W		
TOLERANCE	.XXX ±.005	SHEET OF	1 1	SCALE	2:1	P/N	IPP-1000
	.XX ±.02						
	ANG. ±1/2°					REV.	B