
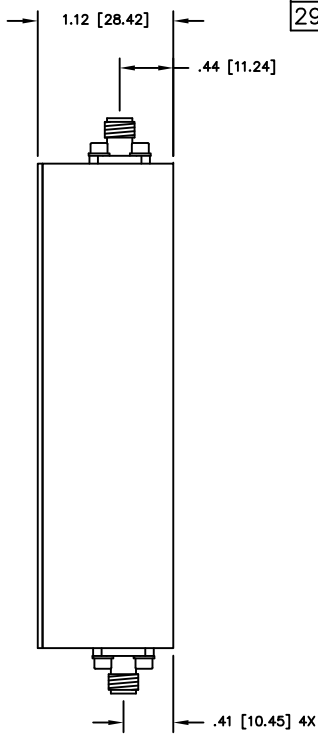


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1481	A	INITIAL RELEASE	DG	5-08
1505	B	REVISE ISOLATION SPECIFICATION	DG	8-08
2449	C	SEE DAR	DG	4-10
2450	D	SEE DAR	DG	4-10
2970	E	SEE DAR	TJD	3-11

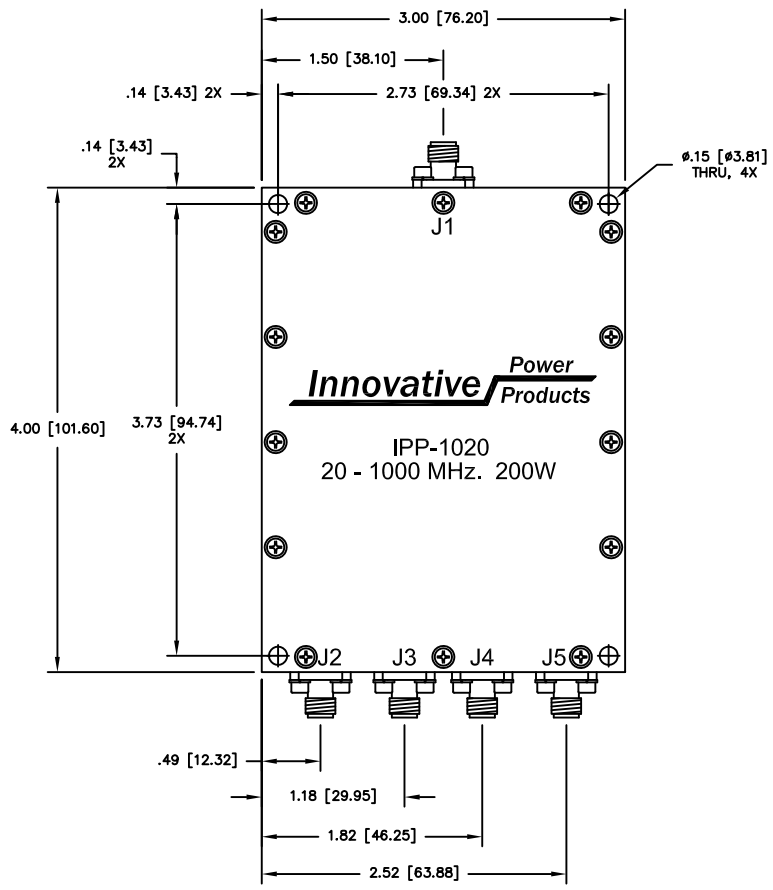

- NOTES:**
- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.
  - RoHS COMPLIANT.

**ELECTRICAL SPECIFICATIONS**

- FREQUENCY: 20 - 1000 MHz.  
 INSERTION LOSS: < 0.75 dB  
 VSWR: < 1.30:1  
 PHASE BALANCE: ±5°  
 AMPLITUDE BALANCE: ±0.25 dB  
 POWER: 200 WATT  
 ISOLATION: >12 dB 20-125 MHz  
 >15 dB 125-1000 MHz  
 TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	5-08	
	6061-T651	ENG	TJD	DATE	5-08	
FINISH	CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	MANUF	TP	DATE	5-08	TITLE
		CAGE CODE: 437R2			4 - WAY 20 - 1000 MHz 200 WATT	
TOLERANCE	.XX ±.02	SHEET	OF	SCALE	1:1	SIZE
	.XXX ±.010					B
	ANG. ±1/2°	1	1			P/N
						IPP-1020
						REV.
						E