


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1662	A	INITIAL RELEASE	DG	12-08
2450	B	SEE DAR	DG	6-10

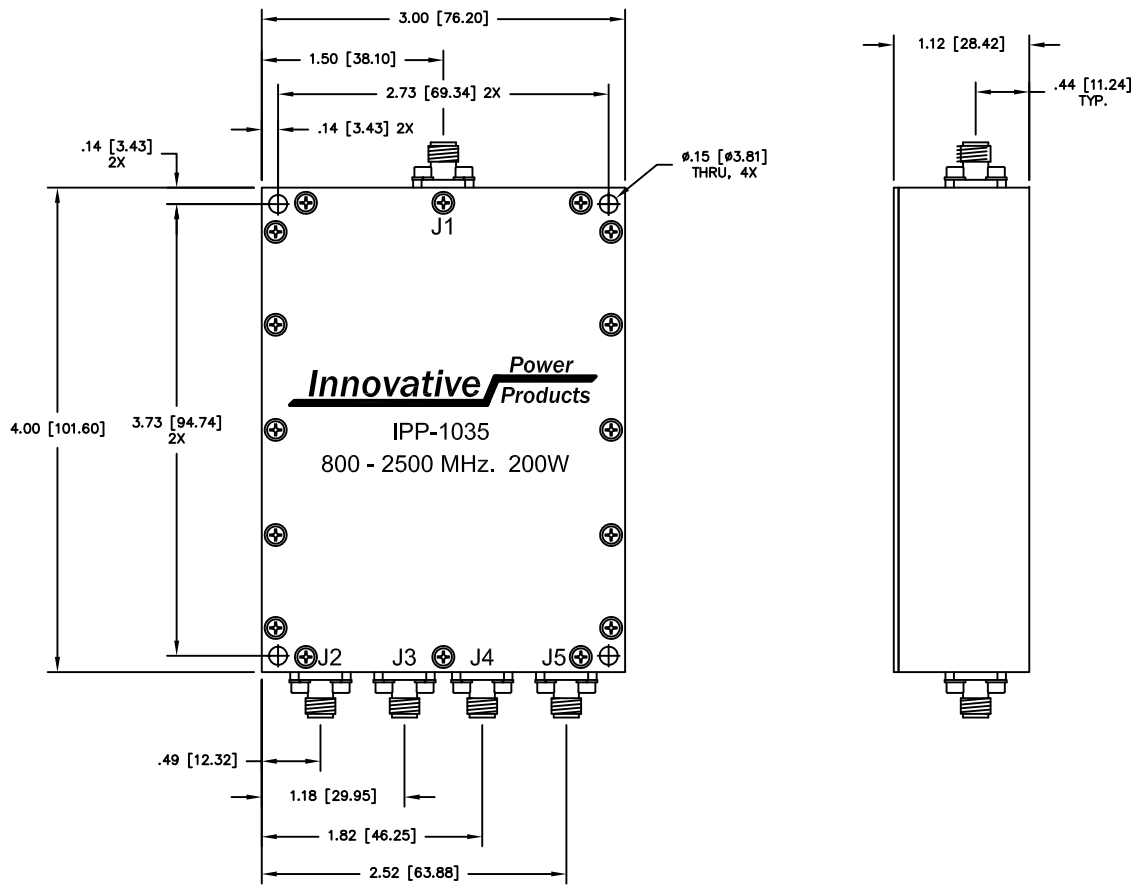

NOTES:

- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	800 - 2500 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.30:1
AMPLITUDE BALANCE:	± 0.25 dB
PHASE BALANCE:	±5°
POWER:	200 WATT
ISOLATION:	>12 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN	DG	DATE	9-08	Innovative Power Products		
	ENG	TJD	DATE	9-08			
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290. .0003 MIN. SEMI-BRIGHT	MANUF	RR	DATE	9-08		TITLE OUTLINE 4 - WAY 800 - 2500 MHz 200 WATT	
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2			SCALE 1:1	SIZE B	P/N IPP-1035	REV. B
	SHEET	OF	1				