


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1703	A	INITIAL RELEASE	DG	1-09
4029	B	SEE ATTACHED	TJD	11-12
5184	C	SEE DAR	DG	9-14
5368	D	SEE DAR	DG	1-15

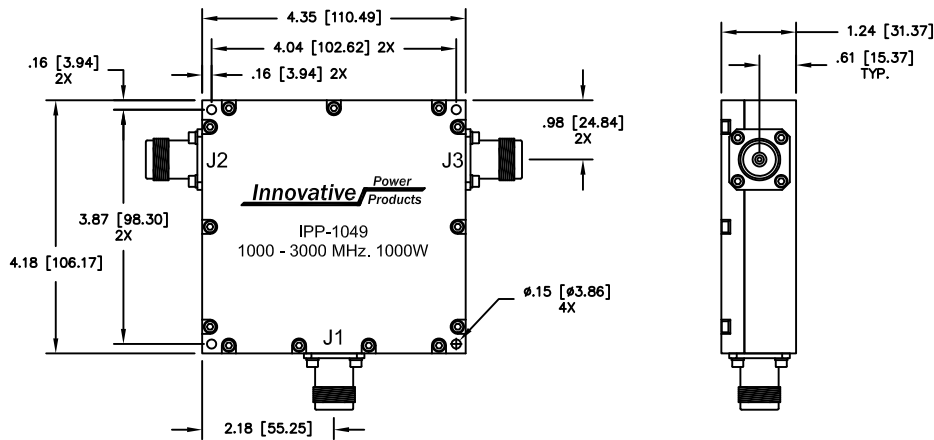

NOTES:

- CONNECTORS: J1 - J3 TYPE "SC" FEMALE
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	1000 - 3000 MHz.
INSERTION LOSS:	< 0.25 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5.0°
AMPLITUDE BALANCE:	±0.20 dB
POWER:	1000 WATT
TEMPERATURE:	-40°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 1-22-09			
	ENG TJD	DATE 1-22-09			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF RR	DATE 1-22-09	TITLE OUTLINE, 2-WAY COMBINER/DIVIDER 1000-3000 MHz., 1000W		
	CAGE CODE: 437R2		SIZE B	P/N IPP-1049	REV. D
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF 1 1	SCALE .5:1			