


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1763	A	INITIAL RELEASE	DG	3-09
3009	B	SEE DAR	DG	3-11

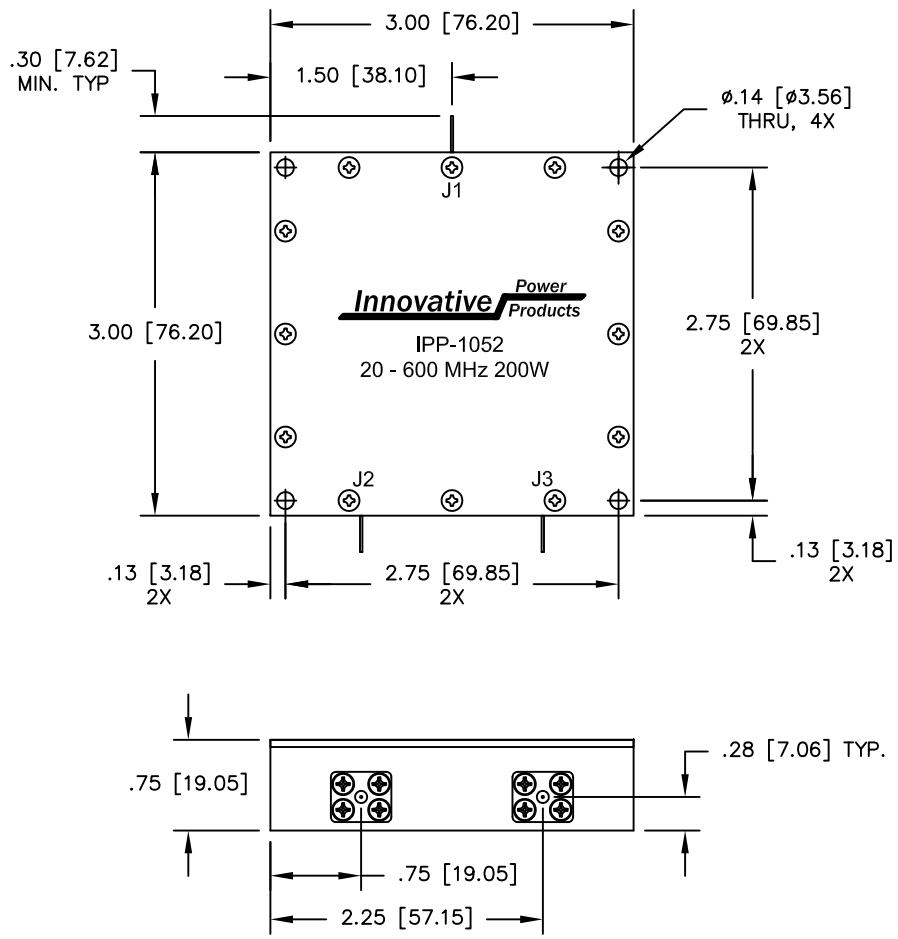

NOTES:

- CONNECTORS: J1 - J3: .02 DIA. PIN

ELECTRICAL SPECIFICATIONS

- FREQUENCY: 20 - 600 MHz.
- INSERTION LOSS: < 0.60 dB
- VSWR: < 1.30:1
- PHASE BALANCE: ±5°
- AMPLITUDE BALANCE: ±0.2 dB
- POWER: 200 WATT
- ISOLATION: >15 dB 20-600MHz.
- J1-J3 Zo: 50 OHMS

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 3-5-09	Innovative Power Products			
	ENG TJD	DATE 3-5-09				
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF RR	DATE 3-5-09	TITLE OUTLINE			
	CAGE CODE: 437R2		2 - WAY 20 - 600 MHz 200 WATT			
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET 1	OF 1	SCALE 1:1	SIZE B	P/N IPP-1052	REV. B