
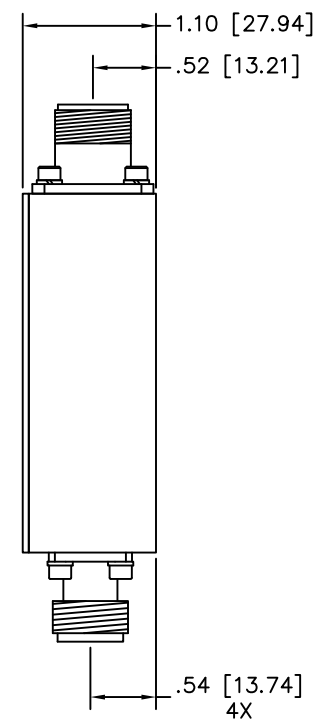


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3409	A	INITIAL RELEASE	TJD	11-11
4551	B	SEE DAR	DG	9-13
4754	C	SEE DAR	DG	1-14

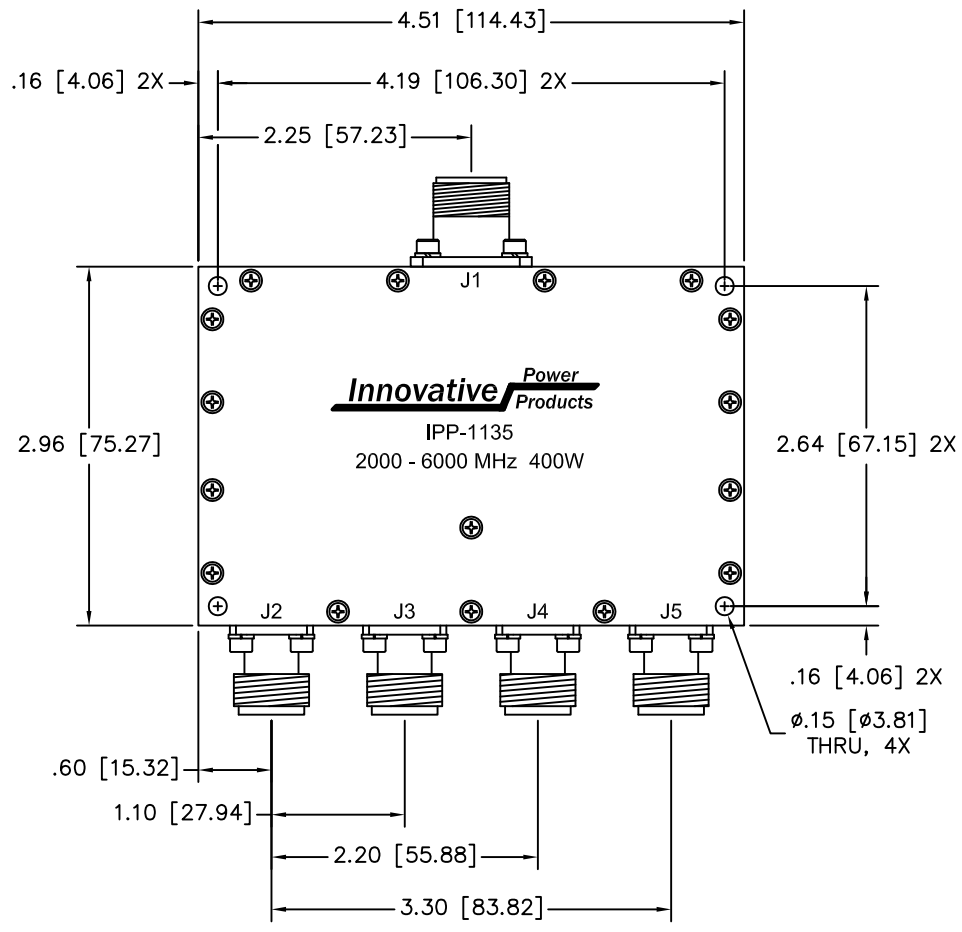

**NOTES:**

- CONNECTORS: J1 - J5 TYPE "N" FEMALE
- RoHS COMPLIANT.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	2000 - 6000 MHz.
INSERTION LOSS:	< 0.80 dB
ISOLATION:	N/A
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.3 dB
POWER:	400 WATT
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN DG	DATE 11-10	<b>Innovative Power Products</b>		
	ENG TJD	DATE 11-10			
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290. .0003 MIN. SEMI-BRIGHT	MANUF	DATE	TITLE OUTLINE		
	CAGE CODE: 437R2		4-WAY, 2000 - 6000 MHz 400W		
TOLERANCE .XXX ±.005 .XX ±.02 ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1	SIZE B	P/N IPP-1135	REV. C