
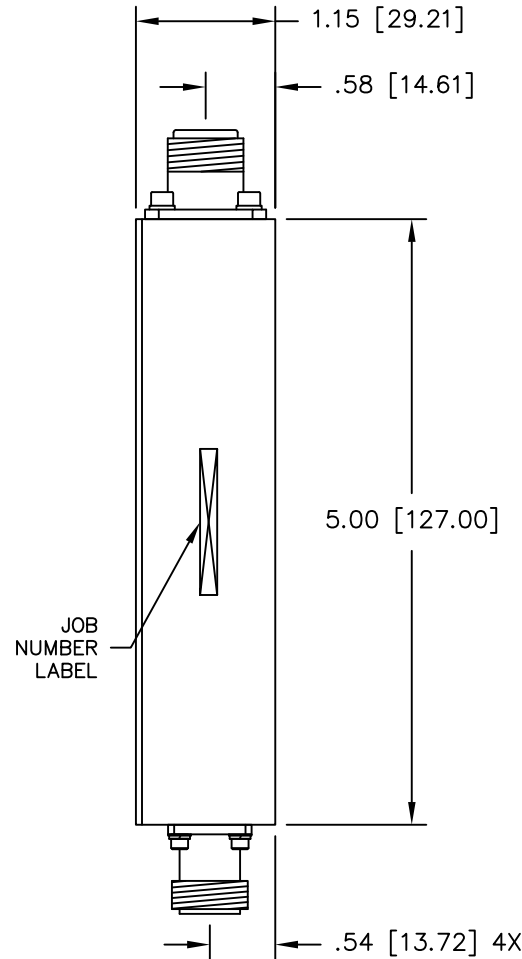


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
4758	B	SEE DAR	DG	1-14
4947	C	SEE DAR	DG	5-14
6737	D	SEE DAR	TJD	6-17

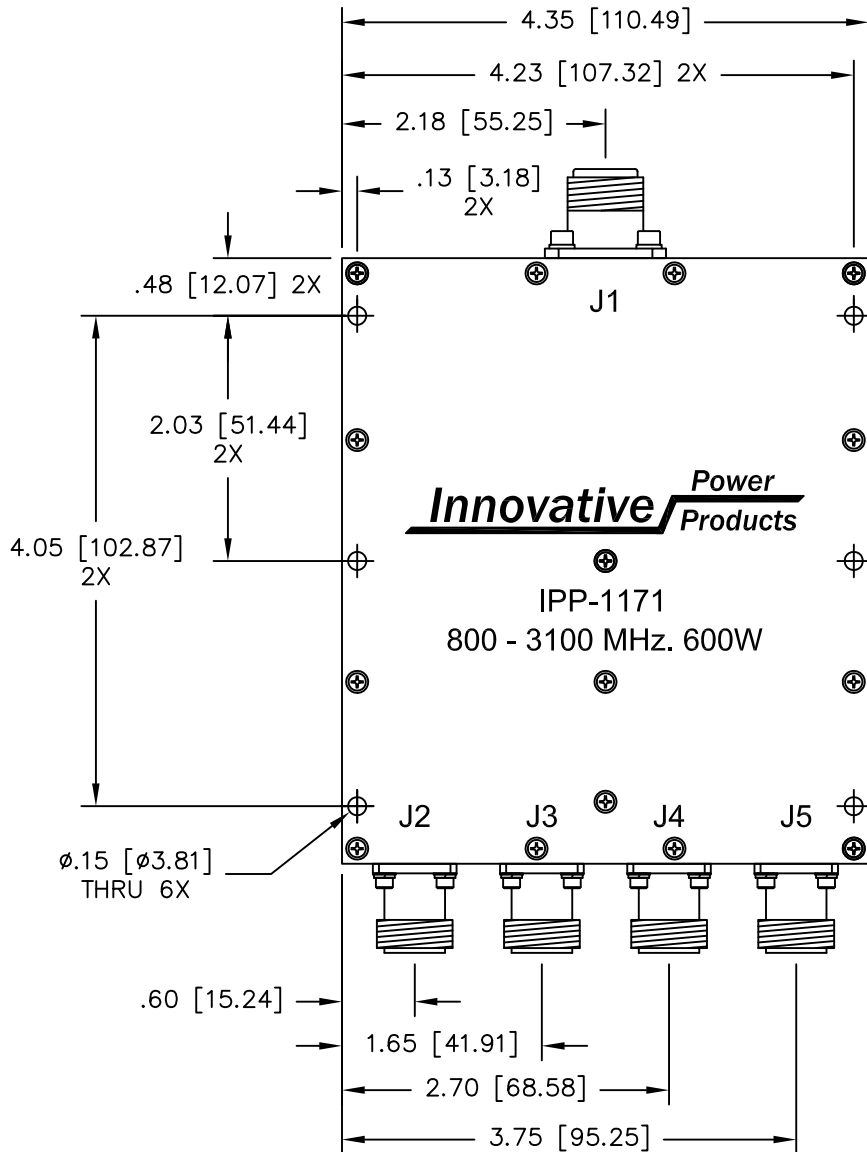

- CONNECTORS: J1-5: TYPE "N" FEMALE.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	800 - 3100 MHz.
INSERTION LOSS:	< 0.65 dB
VSWR:	< 1.30:1
PHASE BALANCE:	$\pm 5^\circ$
POWER:	600 WATT
ISOLATION:	N/A
AMPLITUDE BALANCE:	± 0.3 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN	DG	DATE	10-11	Innovative Power Products		
FINISH	ELECTRODEPOSITED NICKEL PER QQ-N-290. .0003 MIN. SEMI-BRIGHT	ENG	TJD	DATE	10-11			
TOLERANCE	.XX $\pm .02$.XXX $\pm .010$ ANG. $\pm 1/2^\circ$	MANUF		DATE		TITLE	OUTLINE	
		CAGE CODE: 437R2				4 - WAY 800 - 3100 MHz 600 WATT		
		SHEET	OF	SCALE	1:1	SIZE	P/N	REV.
		1	1			B	IPP-1171	D