
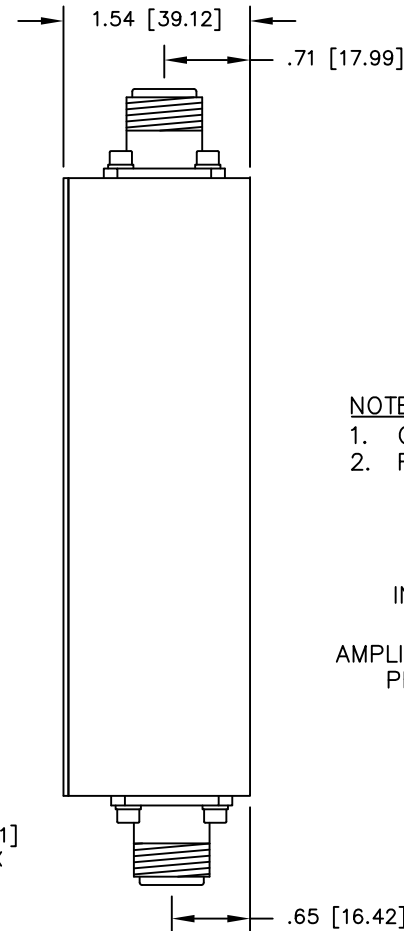


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3890	A	INITIAL RELEASE	.	.

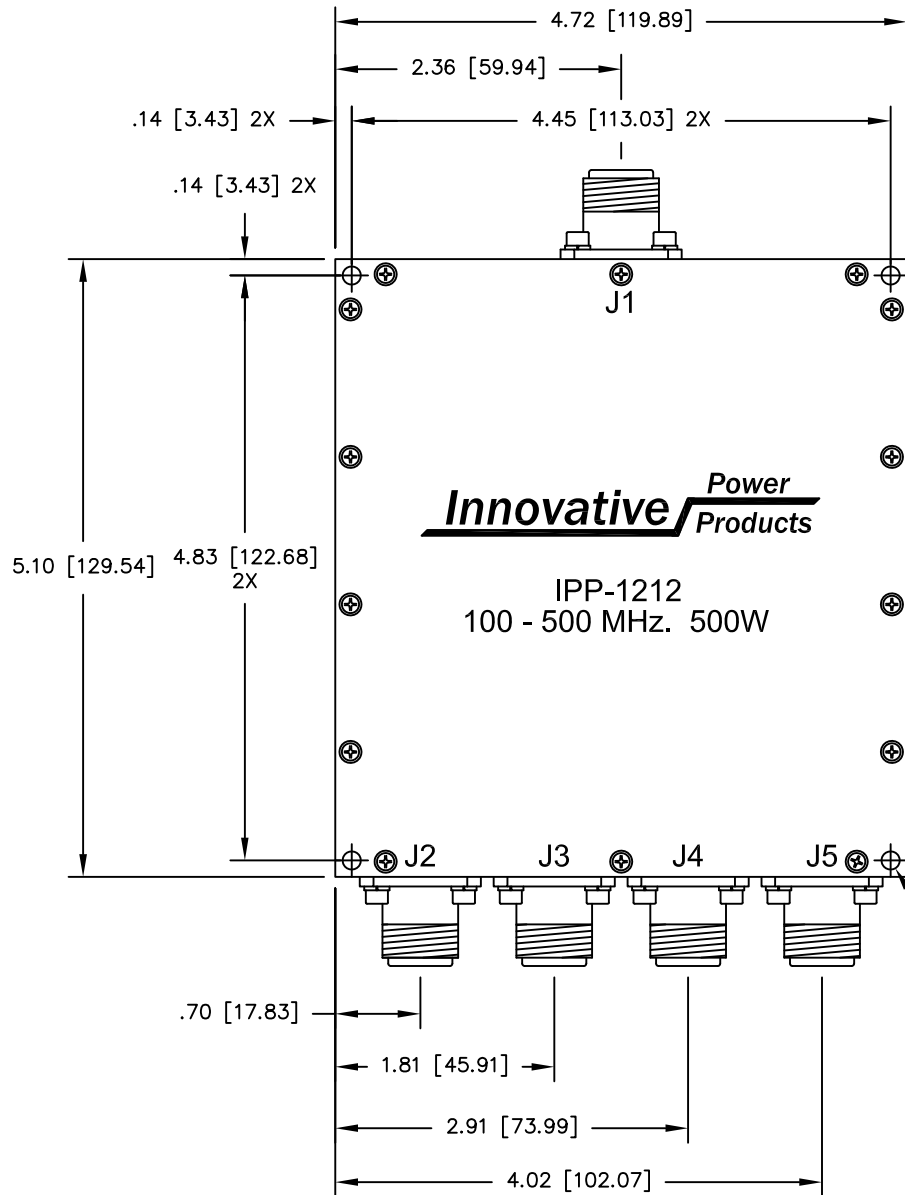

NOTES:

- CONNECTORS: J1 - J5 TYPE "N" FEMALE.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	100 - 500 MHz.
INSERTION LOSS:	< 0.50 dB
VSWR:	< 1.25:1
AMPLITUDE BALANCE:	±0.20 dB
PHASE BALANCE:	±5°
POWER:	500 WATT
ISOLATION:	>15 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 10-12-12	Innovative Power Products		
	ENG .	DATE .			
FINISH CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	MANUF	DATE	TITLE OUTLINE		
	CAGE CODE: 437R2		4 - WAY 100 - 500 MHz 500 WATT		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1	SIZE B	P/N IPP-1212	REV. A