


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
4110	A	INITIAL RELEASE	DG	1-13
5183	B	SEE DAR	DG	9-14

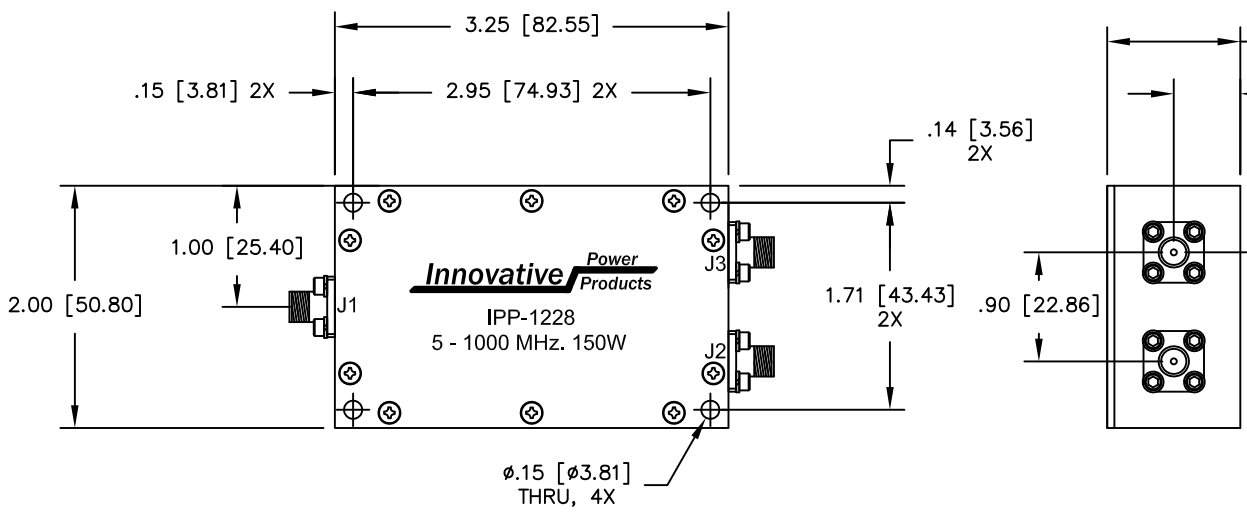

NOTES:

- CONNECTOR TYPE J1, 2, 3: TYPE 'SMA' FEMALE
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	5 - 1000 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.45:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.3 dB
POWER:	150 WATT
ISOLATION:	>12 dB

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 1-18-13	Innovative Power Products			
	ENG DG	DATE 1-13				
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF	DATE	TITLE OUTLINE			
	CAGE CODE: 437R2		2 - WAY 5 - 1000 MHz 150 WATT			
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET 1	OF 1	SCALE 1:1	SIZE B	P/N IPP-1228	REV. B