

CH1 S<sub>11</sub> log MAG 10 dB/ REF 0 dB


IPP-2042 VSWR

Cor

D

START 1 000.000 000 MHz

STOP 2 000.000 000 MHz

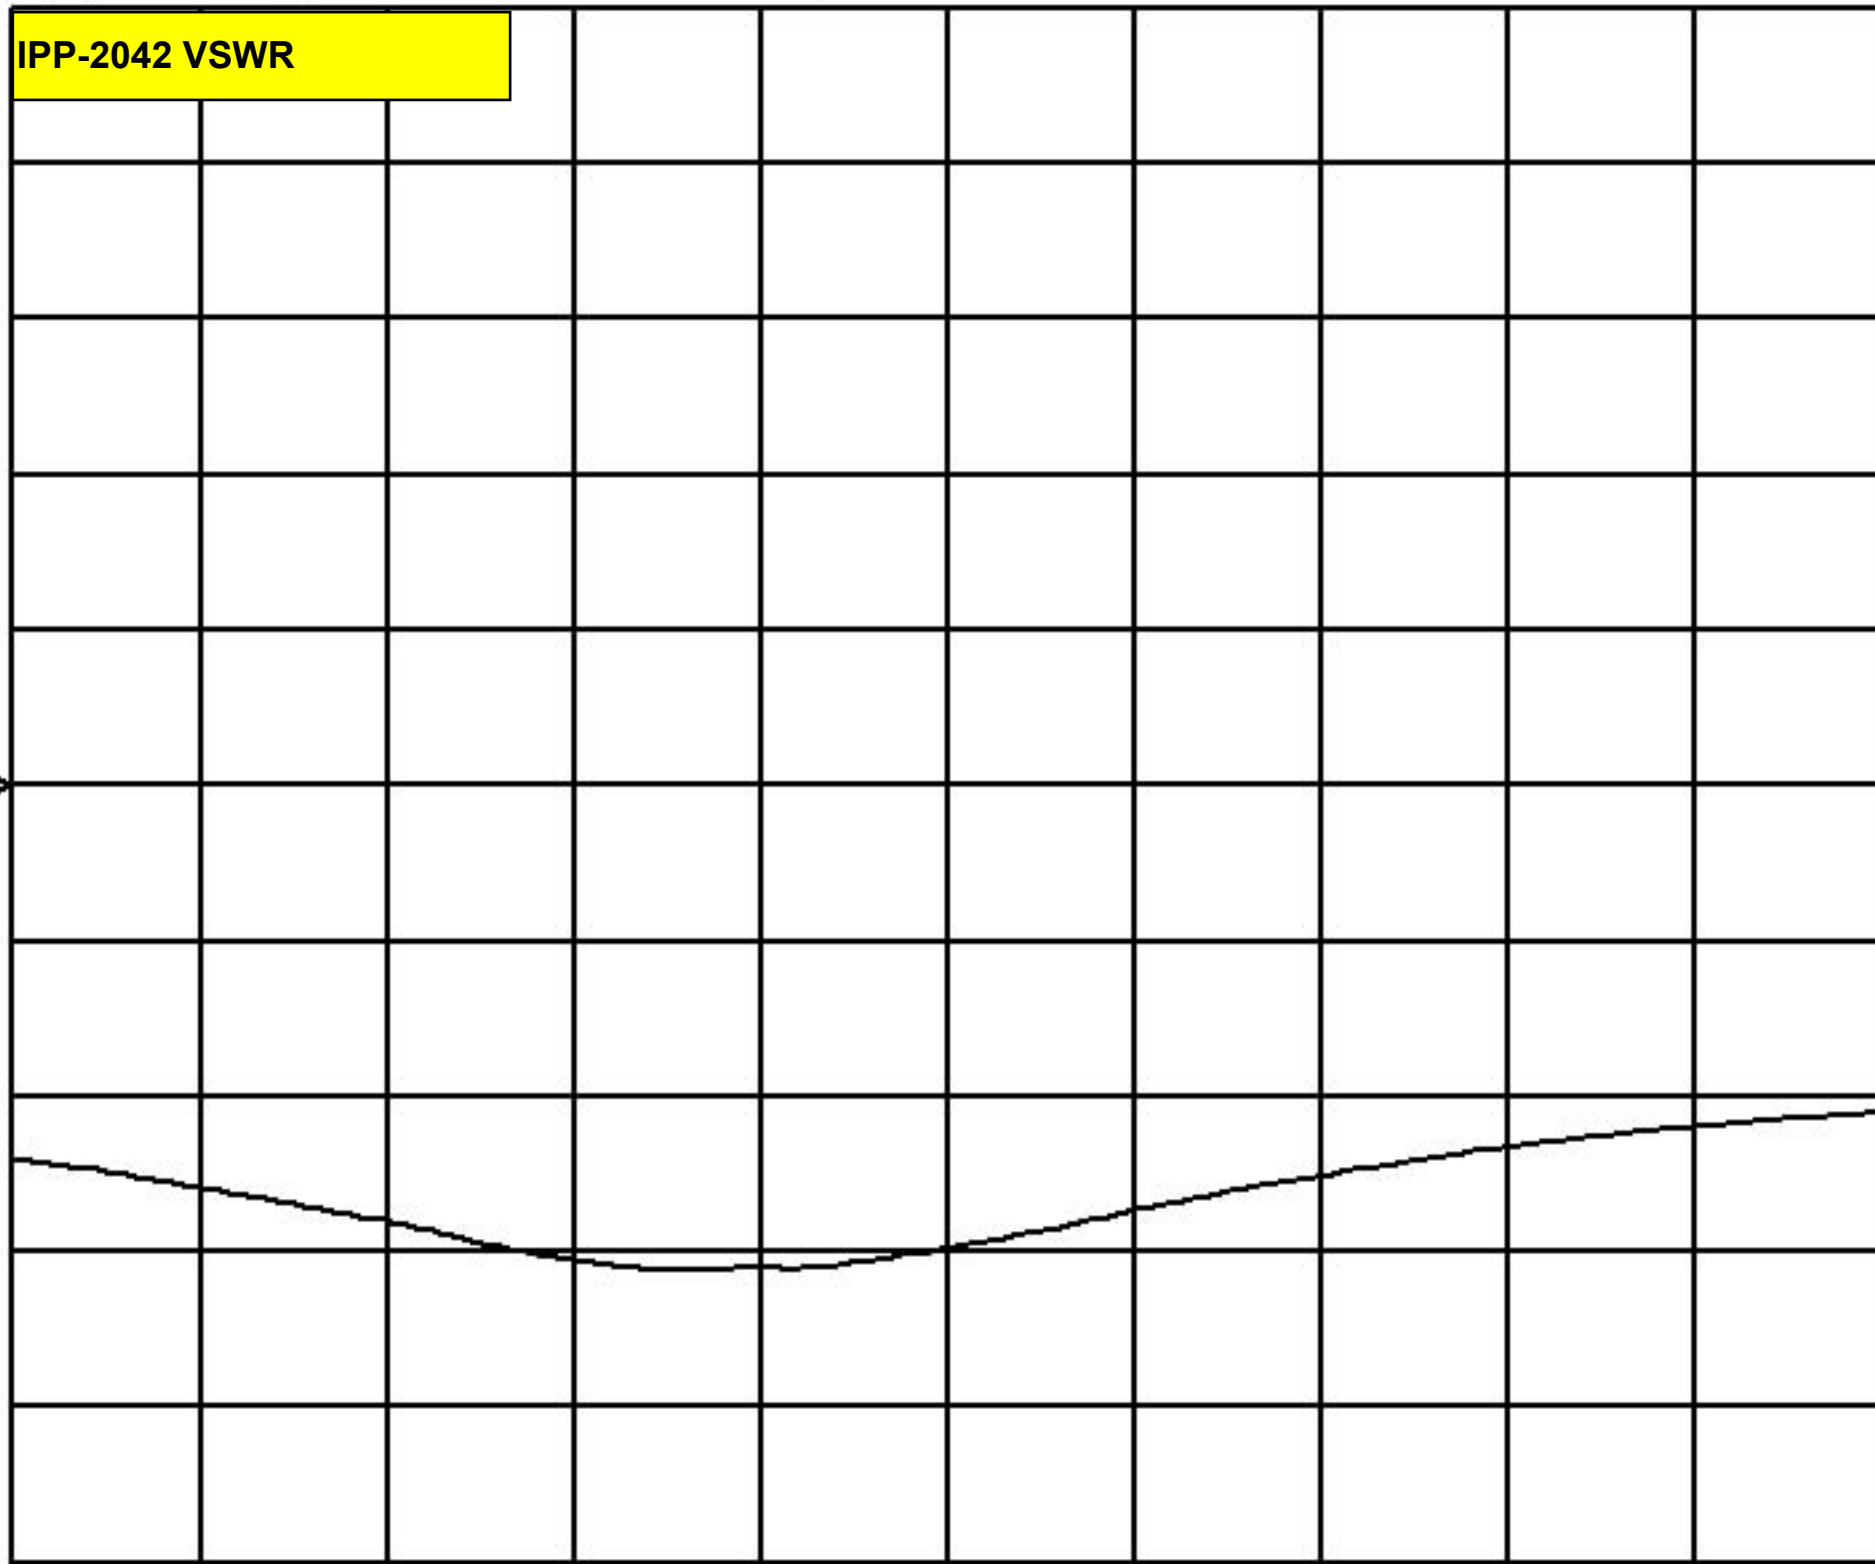

CH2 S<sub>21</sub> & M log MAG

1 dB/ REF -3 dB

11\_ : -2.7584 dB

IPP-2042 Amp. Bal.

1 000.000 000 MHz

REFERENCE VALUE

-3 dB



Cor

↑

START 1 000.000 000 MHz

STOP 2 000.000 000 MHz


CH2 S21 log MAG 10 dB/ REF 0 dB

IPP-2042 Isolation

Cor

↑

START 1 000.000 000 MHz STOP 2 000.000 000 MHz

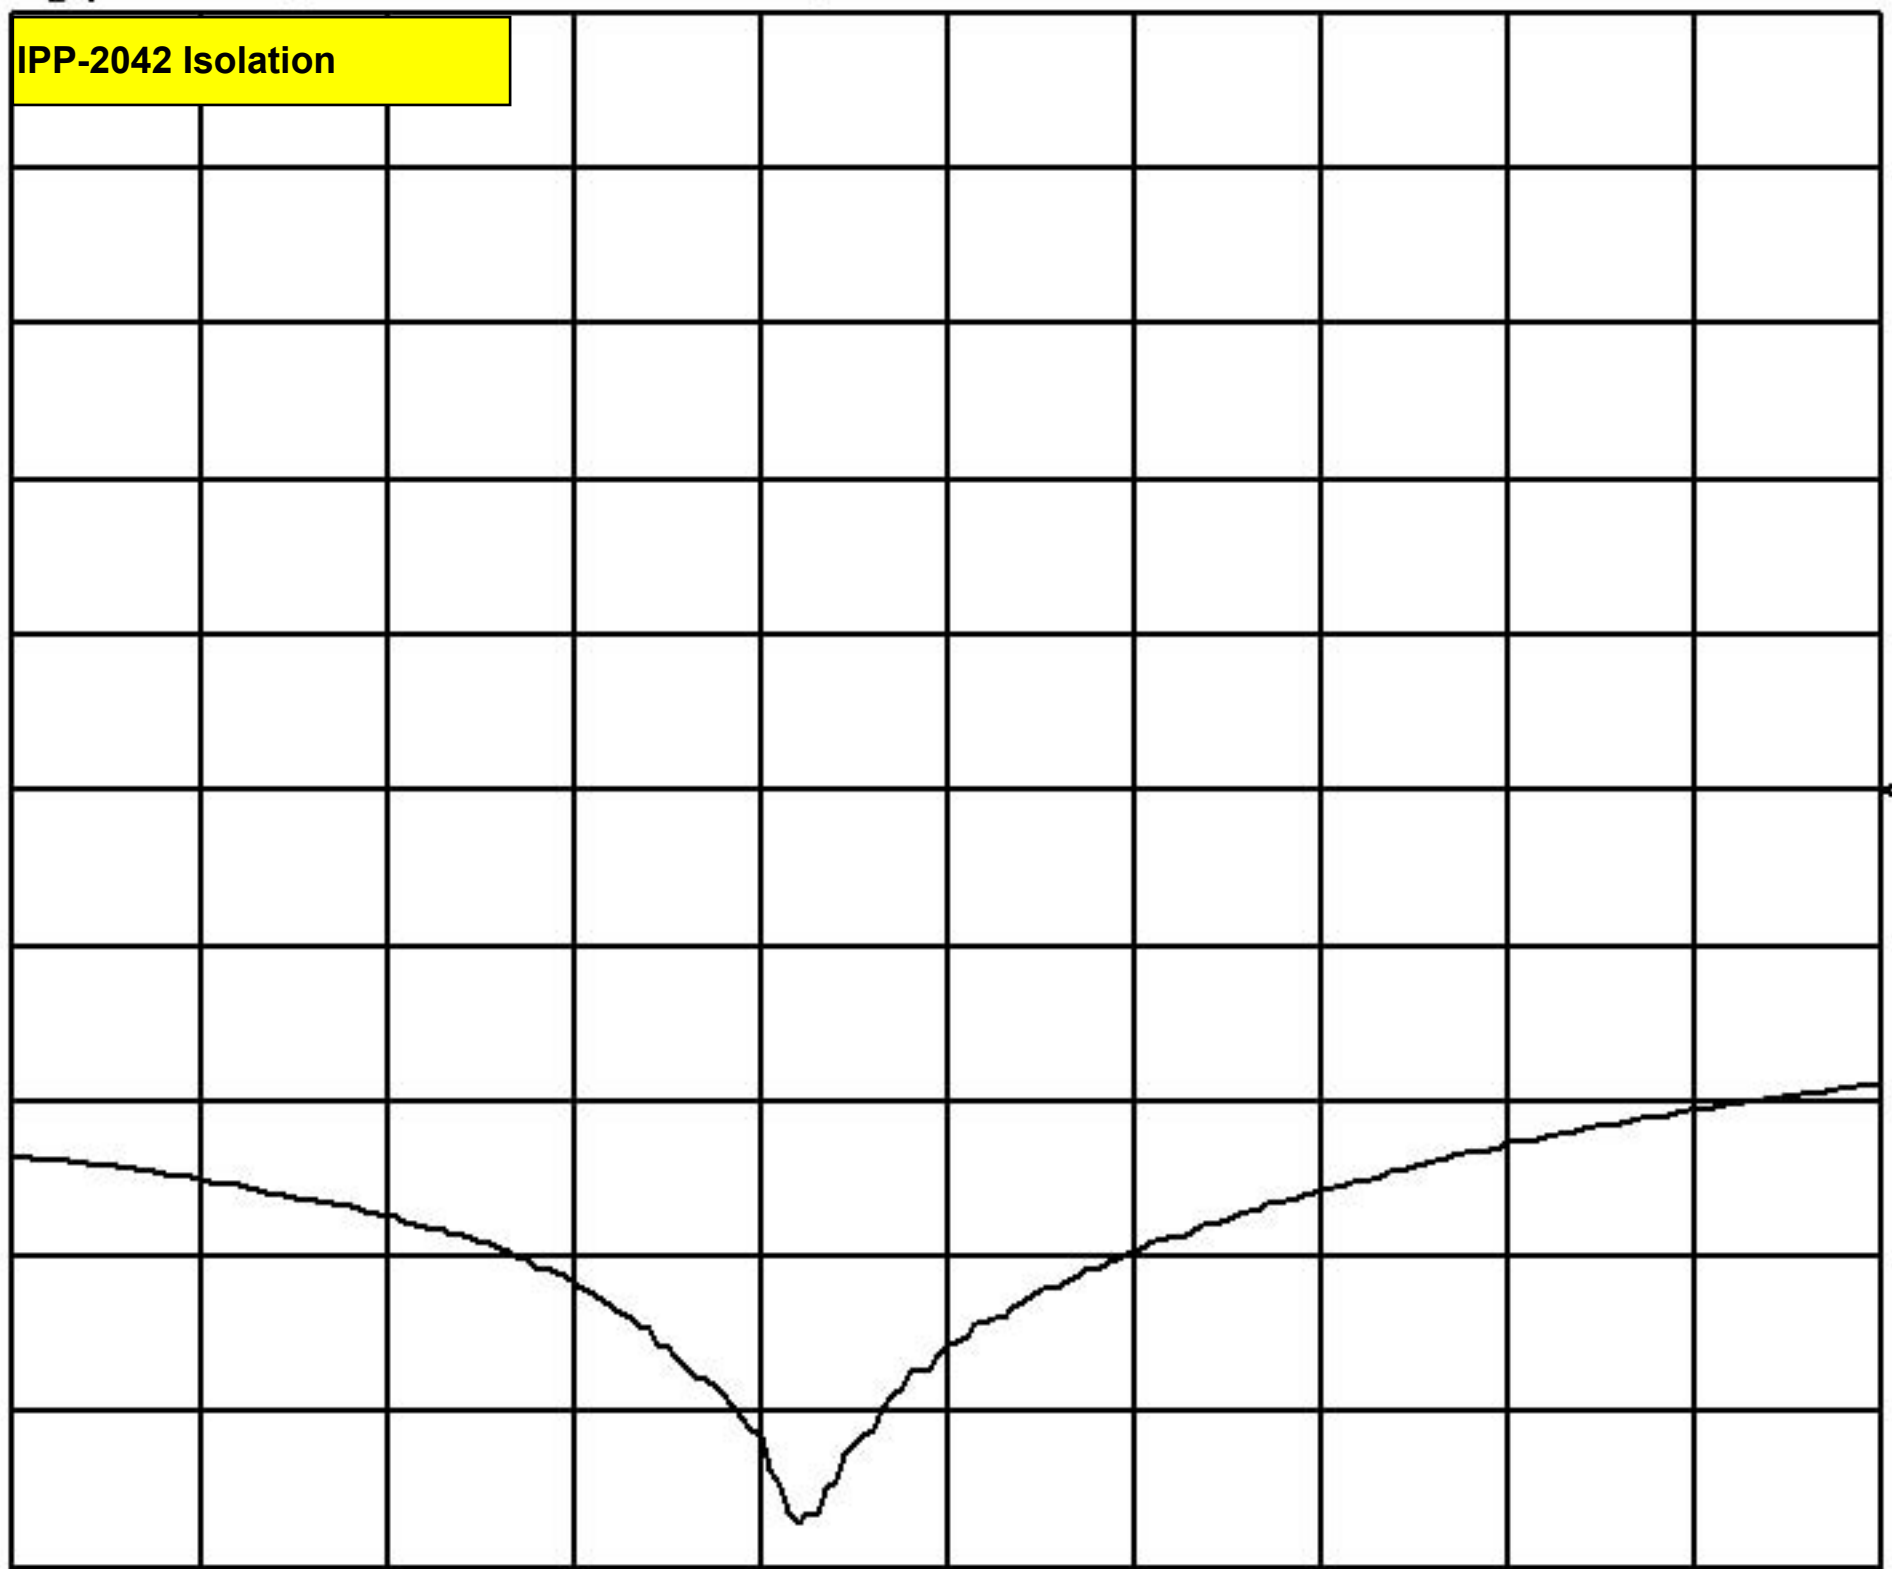

CH2 S<sub>21</sub>/M phase

5 ° / REF - 90 °


11\_ : - 89.07 °

IPP-2042 Phase Bal.

1 000.000 000 MHz

S C A L E

5 ° / d i v



Cor

START 1 000.000 000 MHz

STOP 2 000.000 000 MHz