

CH1 S₁₁ log MAG 10 dB/ REF 0 dB 11_ : - 38.836 dB

IPP-2108 VSWR


1 750.000 000 MHz

2 : - 34.33 dB
- 2.075 GHz

3 : - 26.819 dB
2.4 GHz

REFERENCE VALUE

0 dB

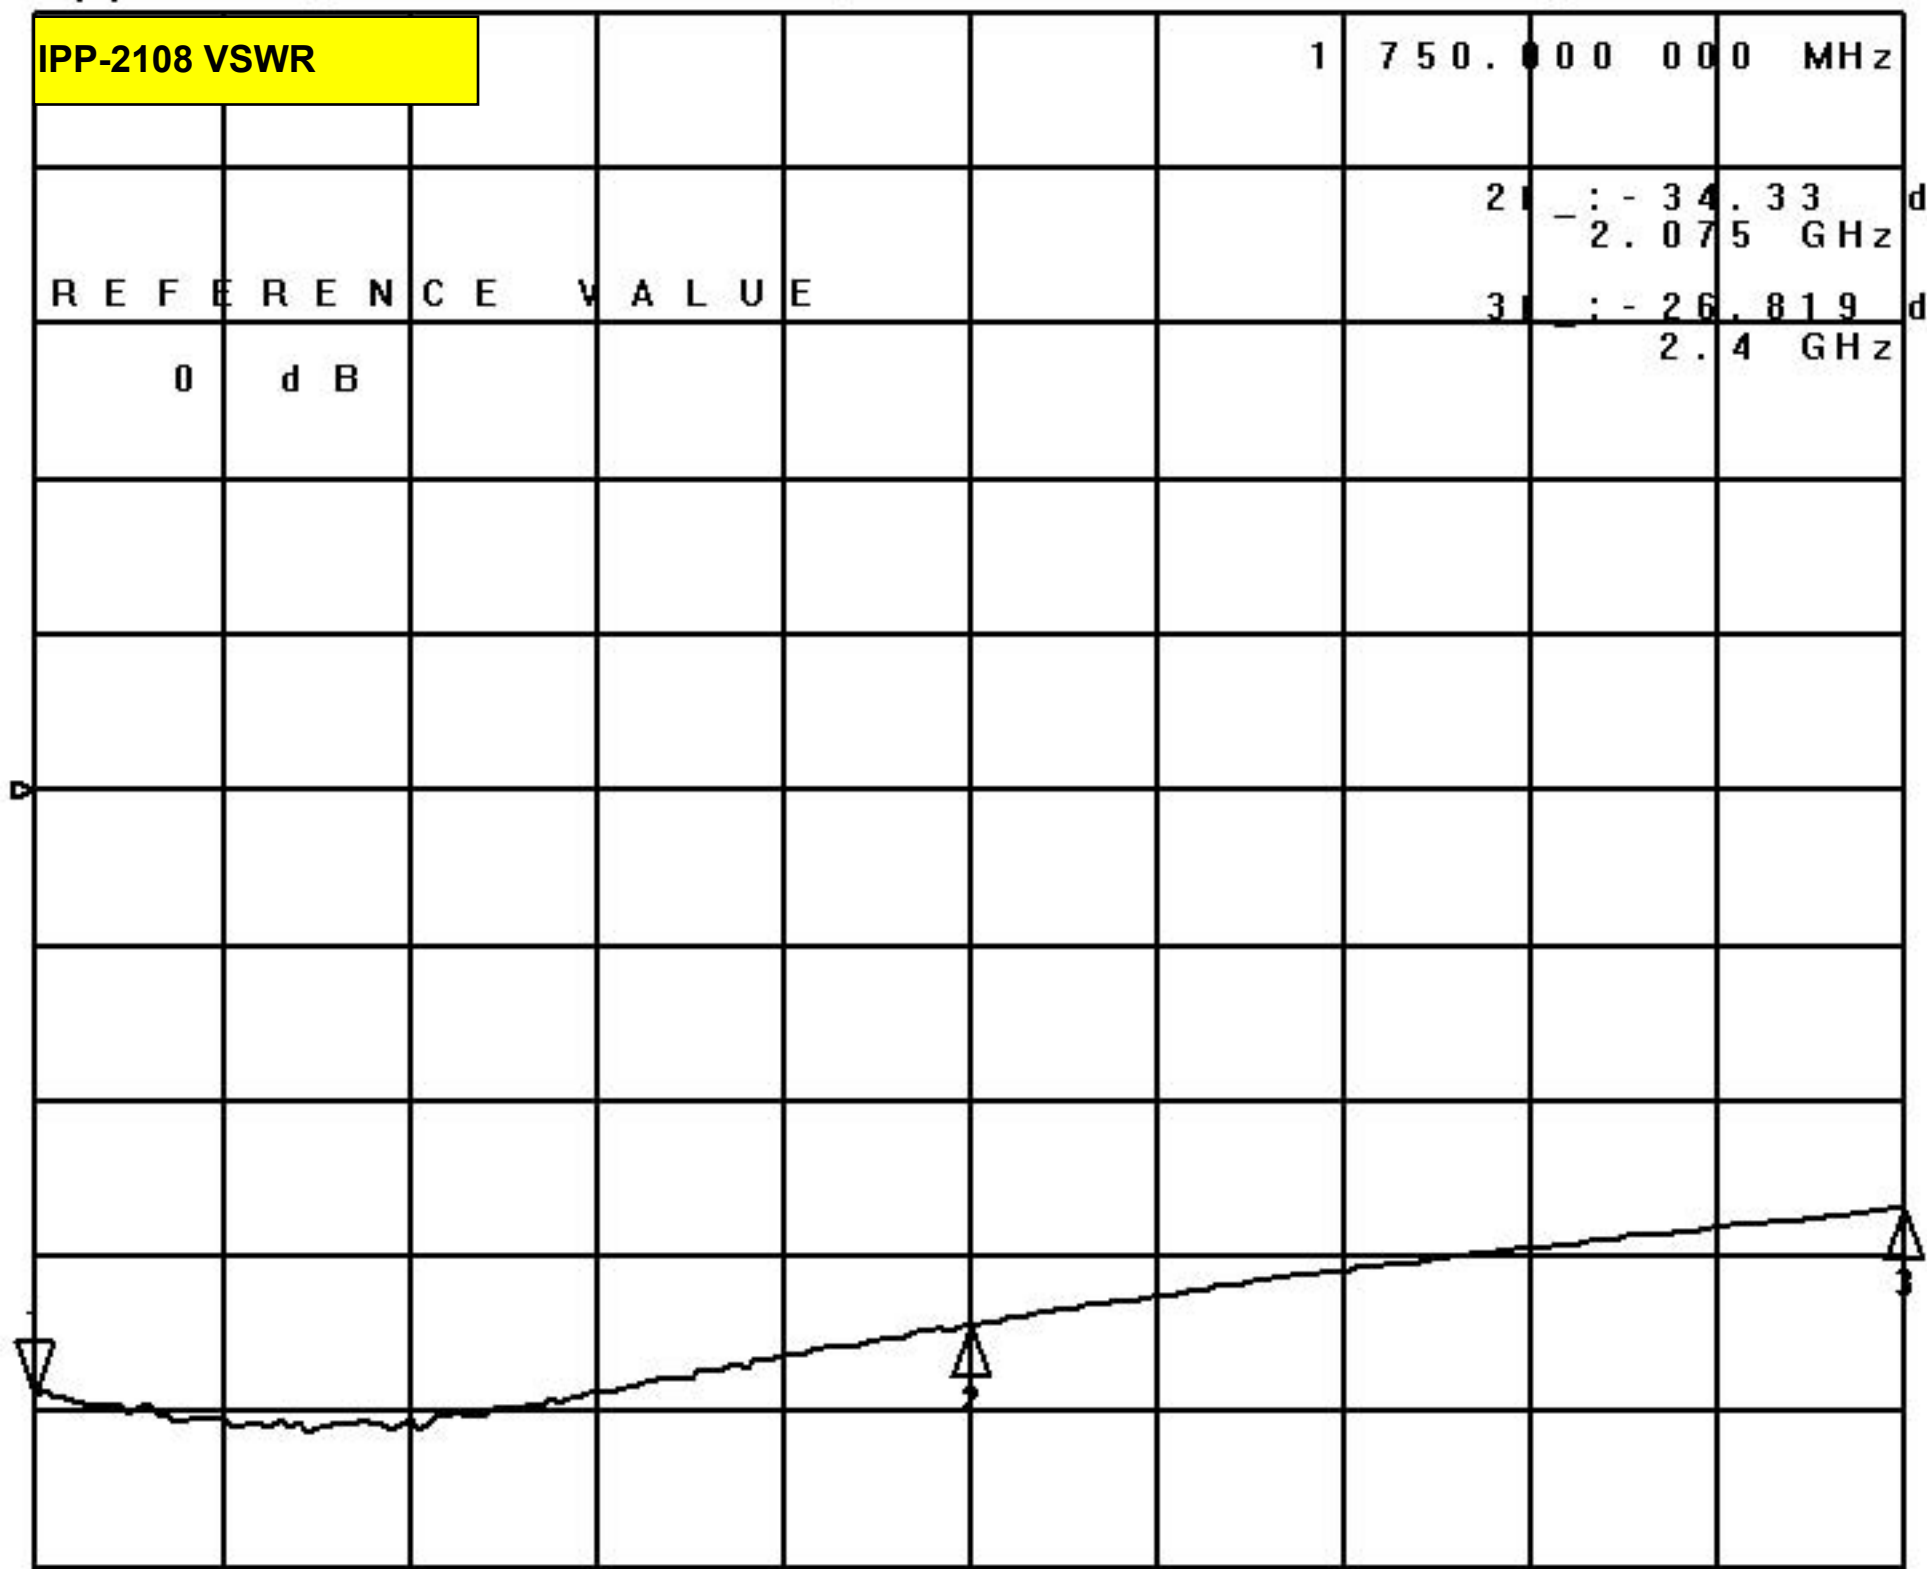

START 1 750.000 000 MHz

STOP 2 400.000 000 MHz

CH2 S₂₁ & M I o g M A G . 5 d B / REF - 3 d B 11 _ : - 3 . 0 0 2 6 d B

IPP-2108 Amp Bal

1 7 5 0 . 0 0 0 0 0 0 M H z

21 - : - 3 . 1 8 8 7 d B
- 2 . 0 7 5 G H z

31 - : - 3 . 0 5 6 4 d B
2 . 4 G H z

S C A L E

. 5 d B / d i v



C o r

START 1 7 5 0 . 0 0 0 0 0 0 M H z

STOP 2 4 0 0 . 0 0 0 0 0 0 M H z

CH2 S₂₁ log MAG 10 dB/ REF 0 dB 11_ : - 24.063 dB

IPP-2108 Isolation

1 750.000 000 MHz

2 : - 24.006 dB

- 2.075 GHz

REFERENCE VALUE

3 : - 25.024 dB

2.4 GHz


0 dB

Cor

↑

START 1 750.000 000 MHz

STOP 2 400.000 000 MHz

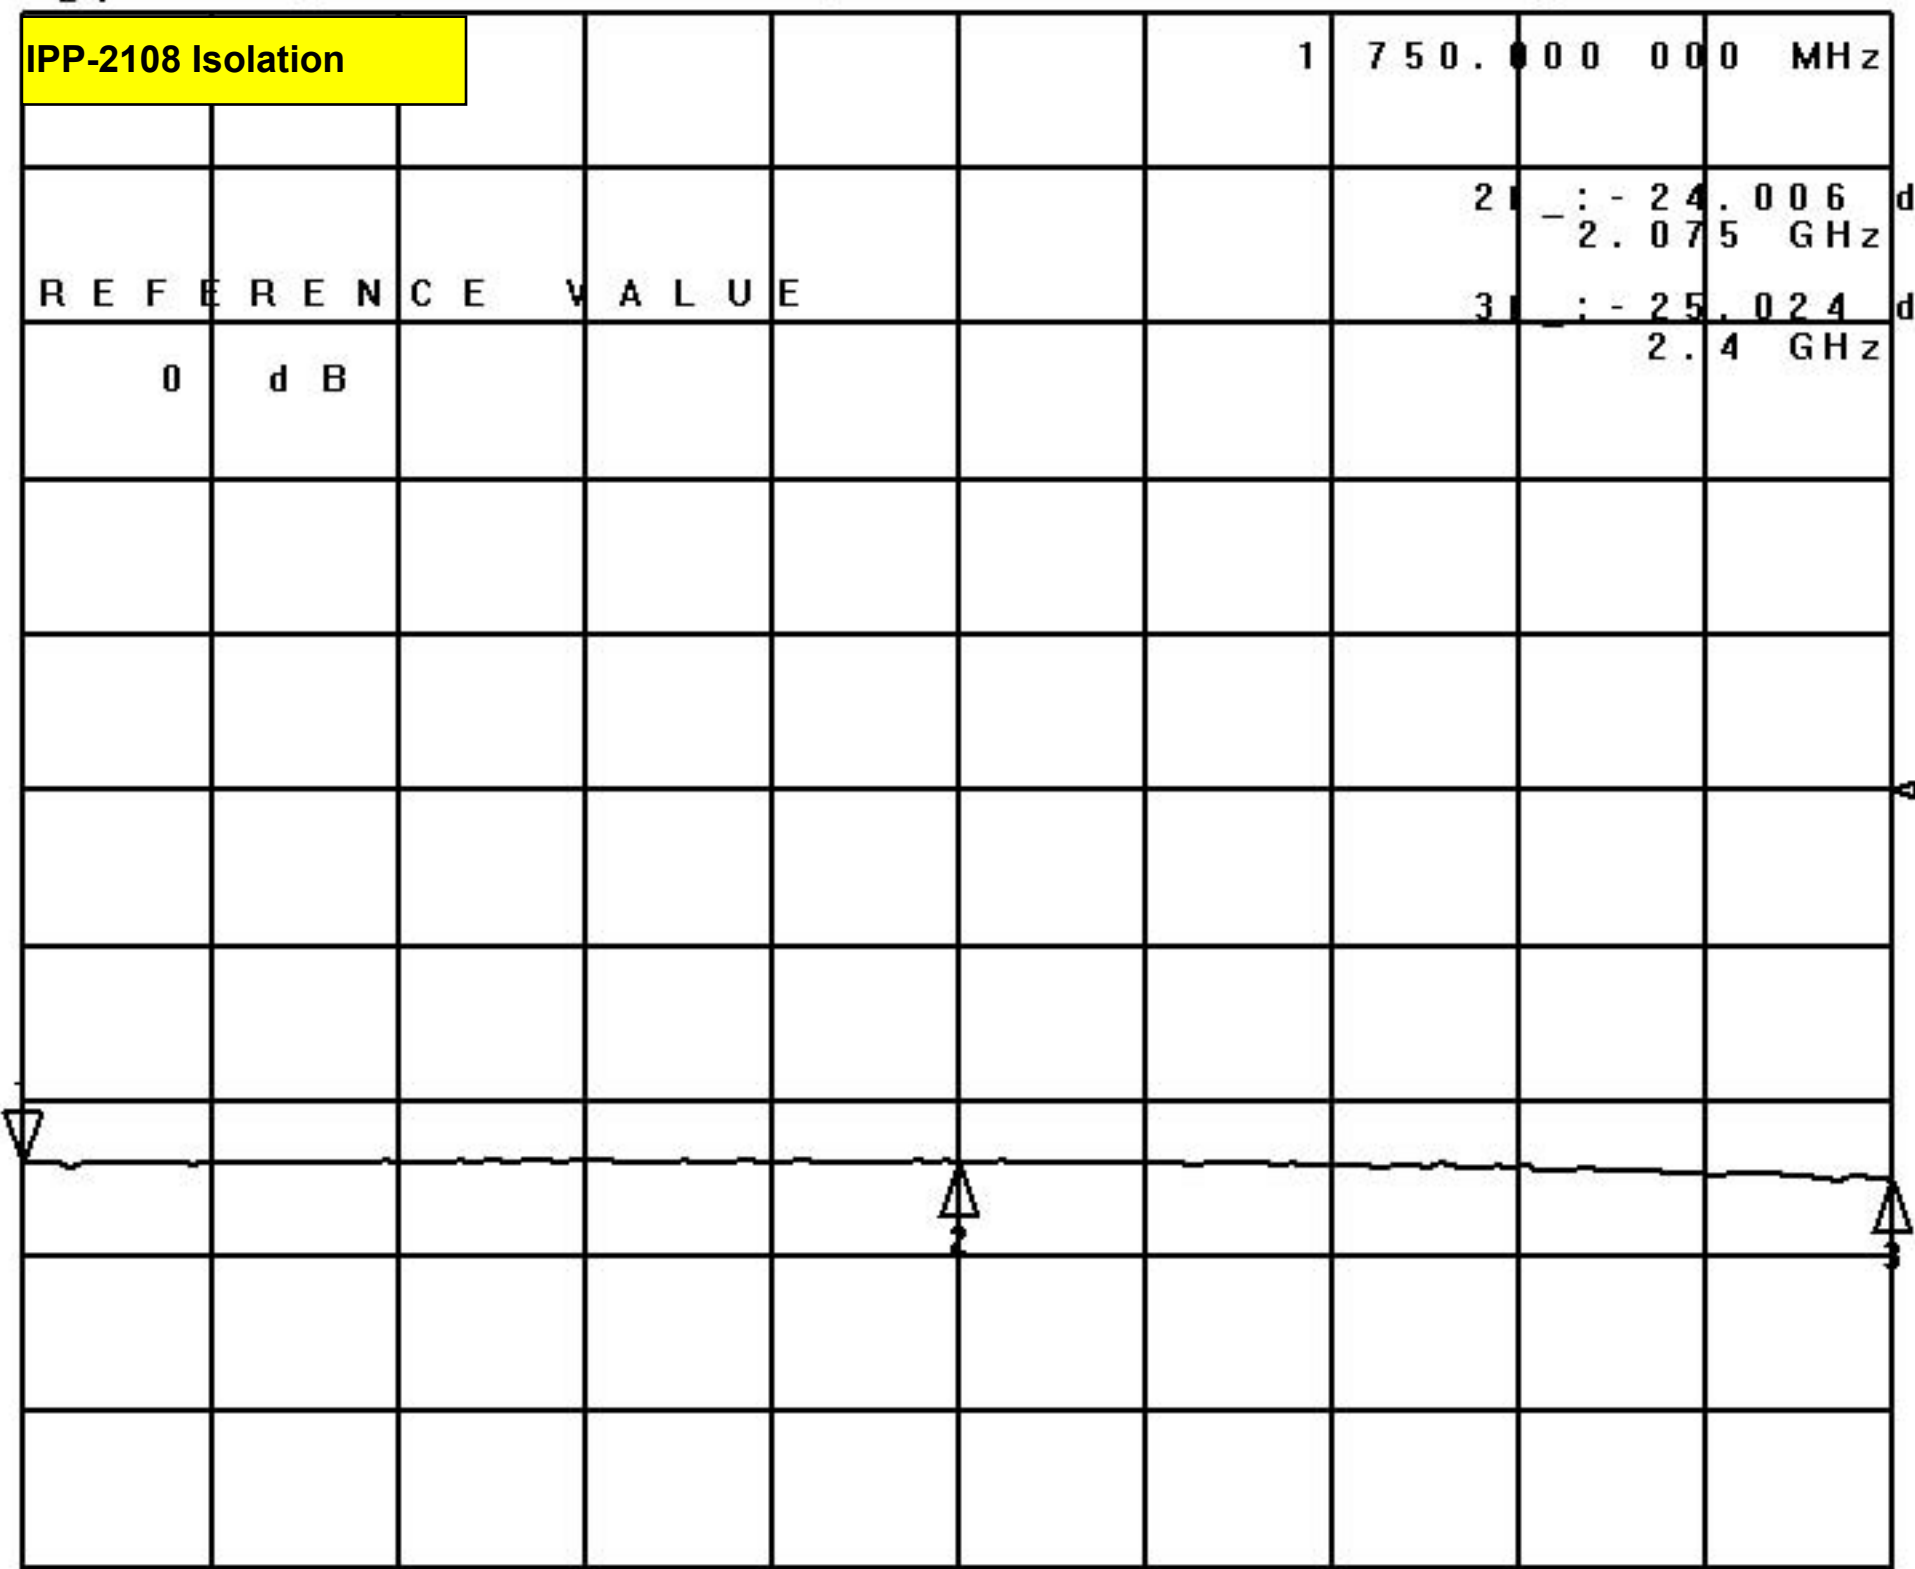

CH2 S₂₁/M phase

5 ° / REF - 90 °

11 _ : - 91.322

IPP-2108 Phase Bal

1 750.000 000 MHz

21 _ : - 91.599


2.075 GHz

S C A L E

31 _ : - 92.071

5 ° / d i v

2.4 GHz

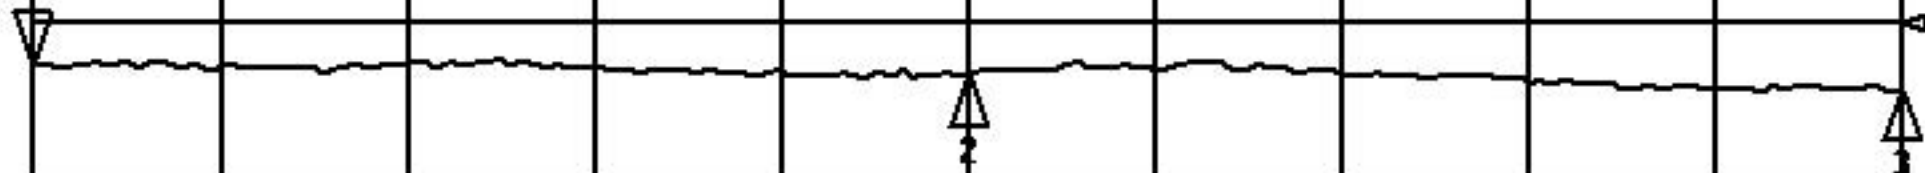

Cor

START 1 750.000 000 MHz

STOP 2 400.000 000 MHz