


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
2239	A	INITIAL RELEASE	DG	1-10
2396	B	SEE DAR	DG	3-10
2445	C	SEE DAR	DG	4-10

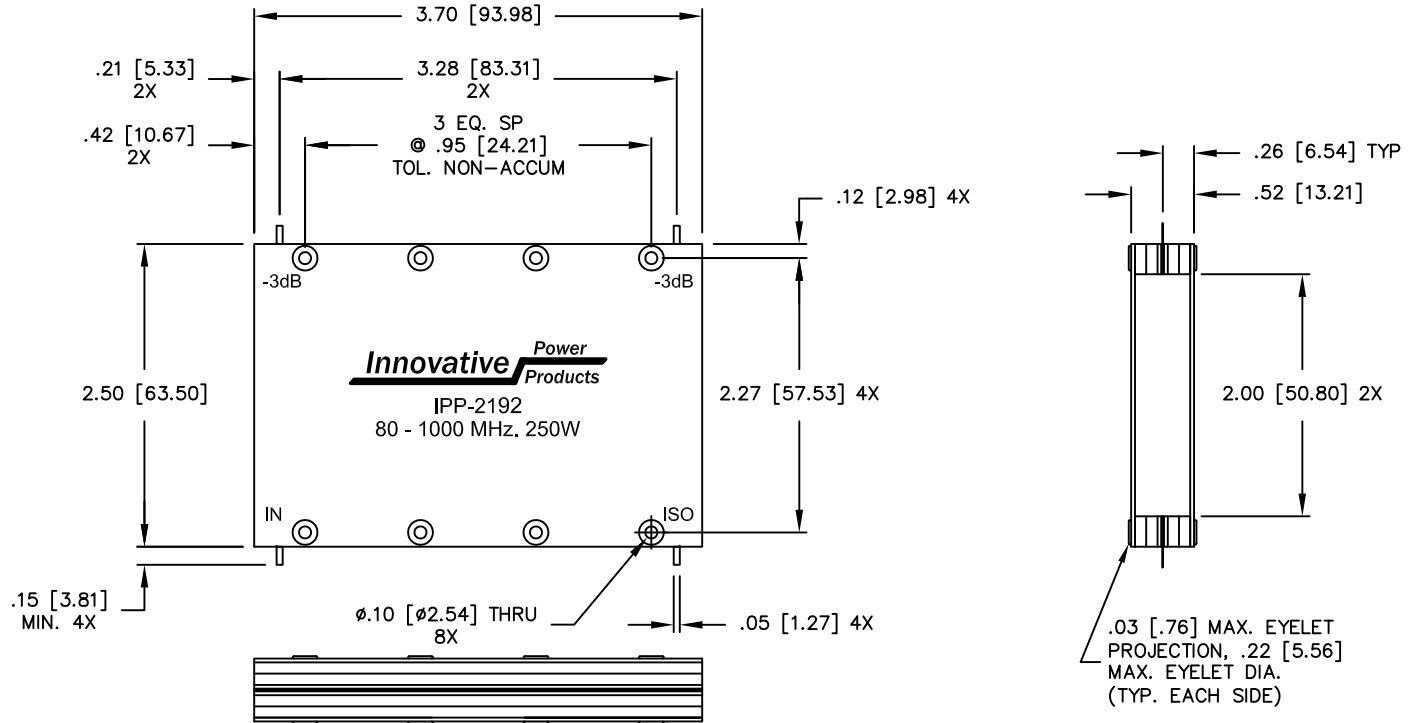

**NOTES**

- LEAD MATERIAL:  
99.99% PURE SILVER  
.005 [0.127] THICK.
- SEE 90° APPLICATION  
NOTE FOR FURTHER  
INFORMATION.
- RoHS COMPLIANT.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	80 - 1000 MHz.
INSERTION LOSS:	< 0.75 dB
VSWR:	< 1.35:1
ISOLATION:	> 16 dB
AMPLITUDE BALANCE:	±1.20 dB
PHASE BALANCE:	±8°
POWER:	250 WATT
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY, 6061-T6	DWN DG	DATE 11-09			
	ENG TJD	DATE 11-09			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF RR	DATE 11-09	TITLE OUTLINE, COUP., 90°, 80 - 1000 MHz. 250W		
	CAGE CODE: 437R2		SIZE B	P/N IPP-2192	REV. C
TOLERANCE IN [MM]	.xx ±.02 [.50] .xxx ±.005 [.127] ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1		