



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
5662	D	SEE DAR	DG	6-15
6383	E	SEE DAR	DG	8-16
7404	F	SEE DAR	TJD	12-18

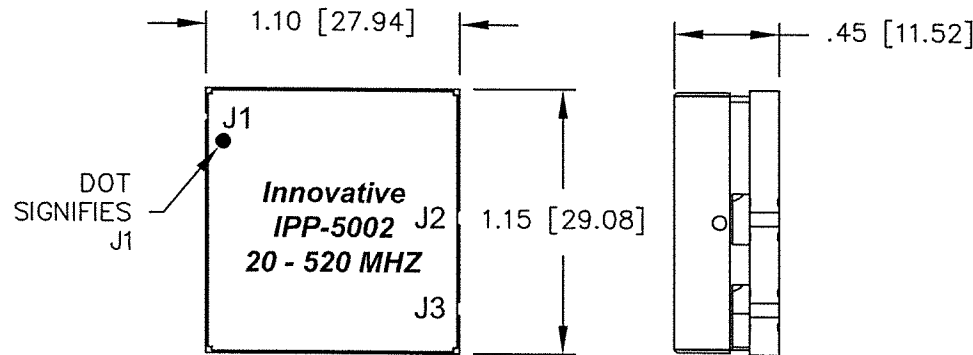

TAPE AND REEL
ORIENTATION




DESPOOLING
DIRECTION

NOTES:

- DO NOT EXCEED 220° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 - 520 MHz.
INSERTION LOSS:	< 0.45 dB
VSWR:	< 1.30:1
PHASE BALANCE:	180° ±5°
AMPLITUDE BALANCE:	±0.45 dB
POWER:	100 WATT
IMPEDANCE:	J1: 50 OHM J2,J3: 25 OHM
TEMPERATURE:	-55°C TO 85°C

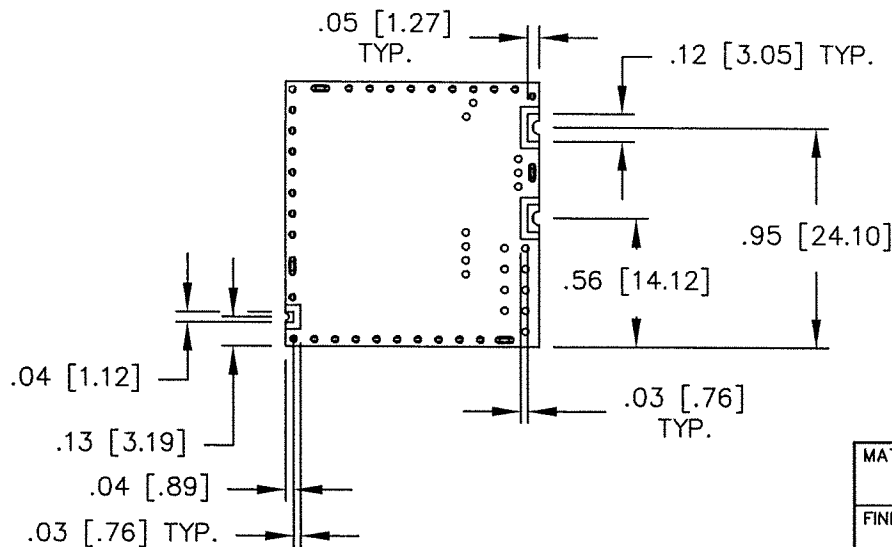

MATERIAL	DWN S.Cornell	DATE 5-21-12	Innovative ^{Power} Products		
FINISH	ENG DG	DATE 5-12			
IMMERSION TIN	MANUF	DATE	TITLE		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		OUTLINE		
	SHEET 1	OF 1	SCALE 2:1	2 - WAY BALUN 20 - 520 MHz 100 WATT	
			SIZE B	P/N IPP-5002	REV. F