
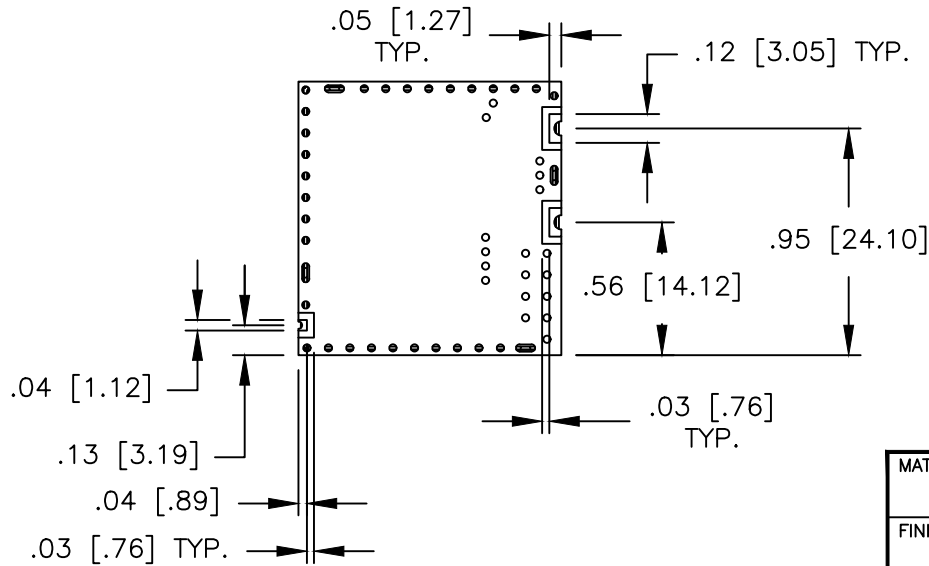


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
6376	D	SEE DAR	DG	8-16
7614	E	SEE DAR	DG	4-19
9101	F	SEE DAR	DG	11-22

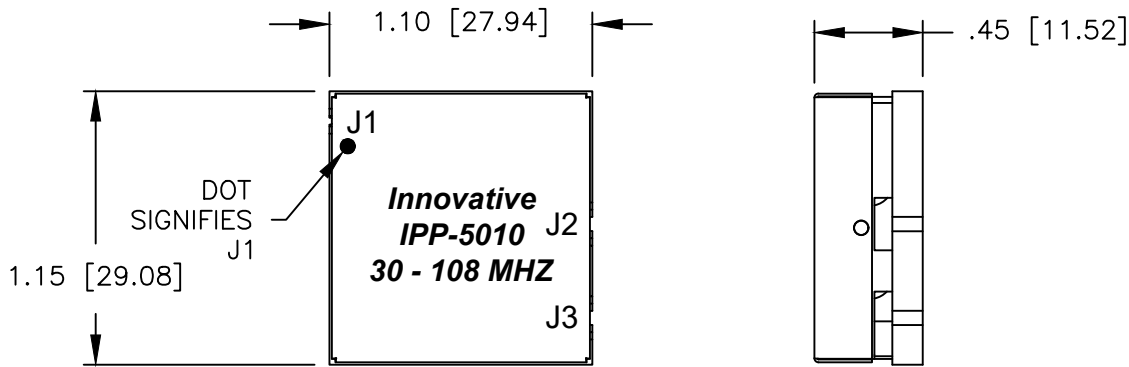

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	30 - 108 MHz.
INSERTION LOSS:	< 0.45 dB
VSWR:	< 1.30:1
PHASE BALANCE:	180° ±5°
AMPLITUDE BALANCE:	±0.45 dB
POWER:	200 WATT
IMPEDANCE:	J1: 50 OHM J2,J3: 25 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN S.Cornell	DATE 9-25-13	Innovative Power Products	
FINISH	ENG DG	DATE 9-13		
IMMERSION TIN	MANUF	DATE	TITLE	
	CAGE CODE: 437R2		OUTLINE	
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET 1 OF 1	SCALE 2:1	2 - WAY BALUN 30 - 108 MHz 200 WATT	
			SIZE B	P/N IPP-5010
				REV. F