
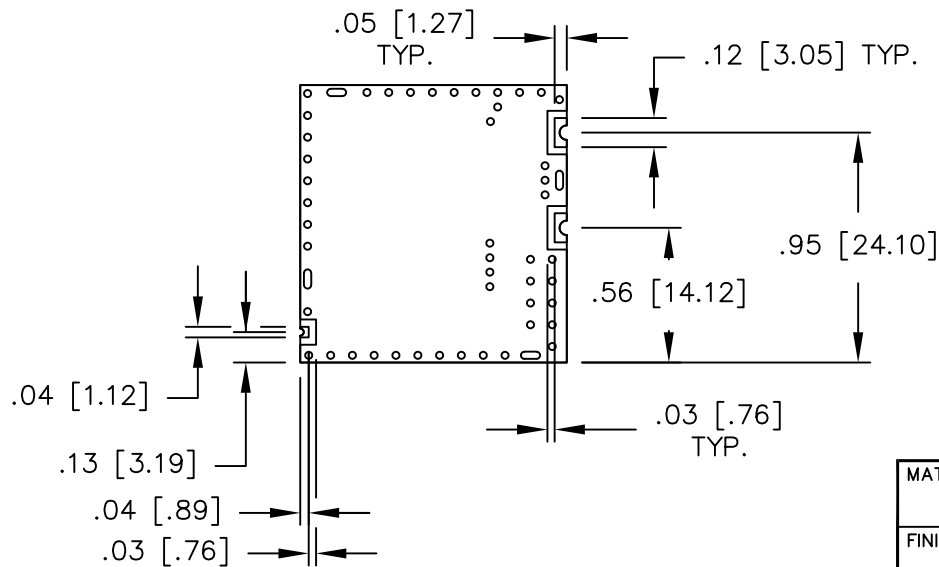


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
6359	A	INITIAL RELEASE	DG	8-16
7616	B	SEE DAR	DG	4-19
7847	C	SEE DAR	DG	9-19

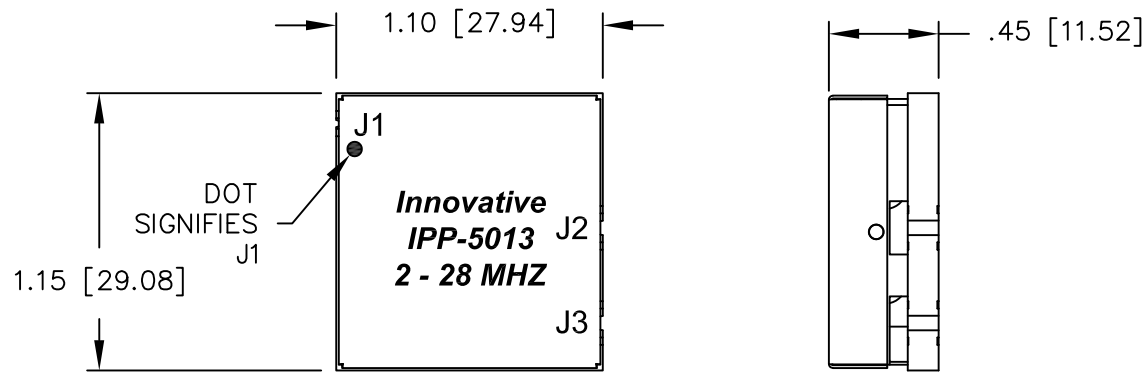

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	2 – 28 MHz.
INSERTION LOSS:	< 0.30 dB
VSWR:	< 1.30:1
PHASE BALANCE:	180° ±5°
AMPLITUDE BALANCE:	±0.30 dB
POWER:	100 WATT
IMPEDANCE:	J1: 50 OHM J2,J3: 25 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN S.Cornell	DATE 7-11-16	Innovative <i>Power</i> Products		
FINISH	ENG DG	DATE 7-16			
IMMERSION TIN	MANUF	DATE	TITLE OUTLINE		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		2 - WAY BALUN 2 - 28 MHZ 100 WATT		
	SHEET OF 1 1	SCALE 2:1	SIZE B	P/N	REV. C
				IPP-5013	