


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7912	A	INITIAL RELEASE	DG	11-19
8492	B	SEE DAR	DG	1-21

TAPE AND REEL
ORIENTATION

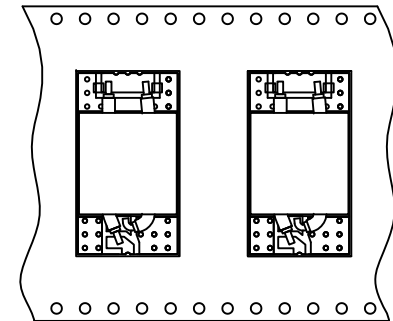


DESPOOLING
DIRECTION

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	30 – 1000 MHz.
INSERTION LOSS:	30-50 MHz < 0.75 dB 50-1000 MHz < 0.60 dB
VSWR:	< 1.43:1
POWER:	100 WATT
IMPEDANCE:	J1: 50 OHM J2: 12.5 OHM
TEMPERATURE:	-55°C TO 85°C

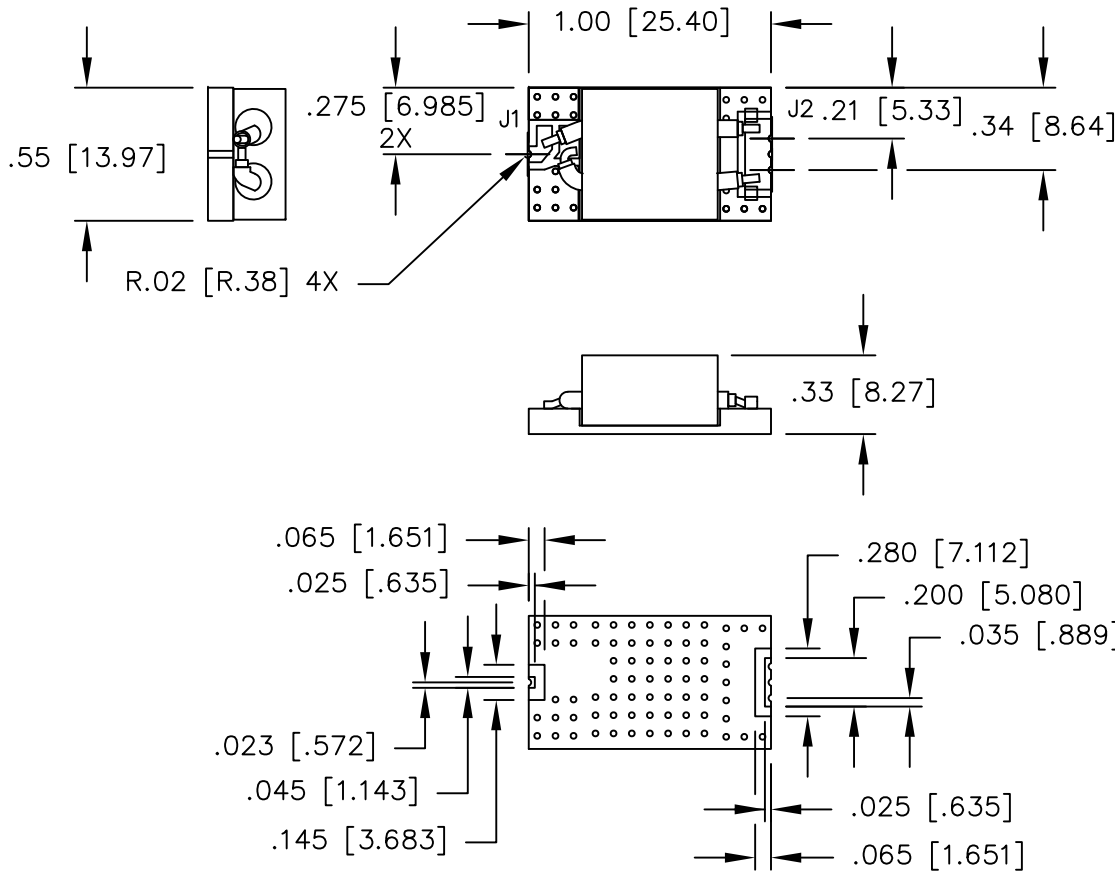

MATERIAL	DWN S.Cornell	DATE 2-27-18	Innovative Power Products		
FINISH	ENG DG	DATE 2-18			
IMMERSION TIN	MANUF	DATE	TITLE OUTLINE, UNBALANCED TO UNBALANCED TRANSFORMER, 30 - 1000 MHz 100 WATT		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2				
SHEET 1 OF 1	SCALE 2:1	SIZE B	P/N	IPP-5014	REV. B