
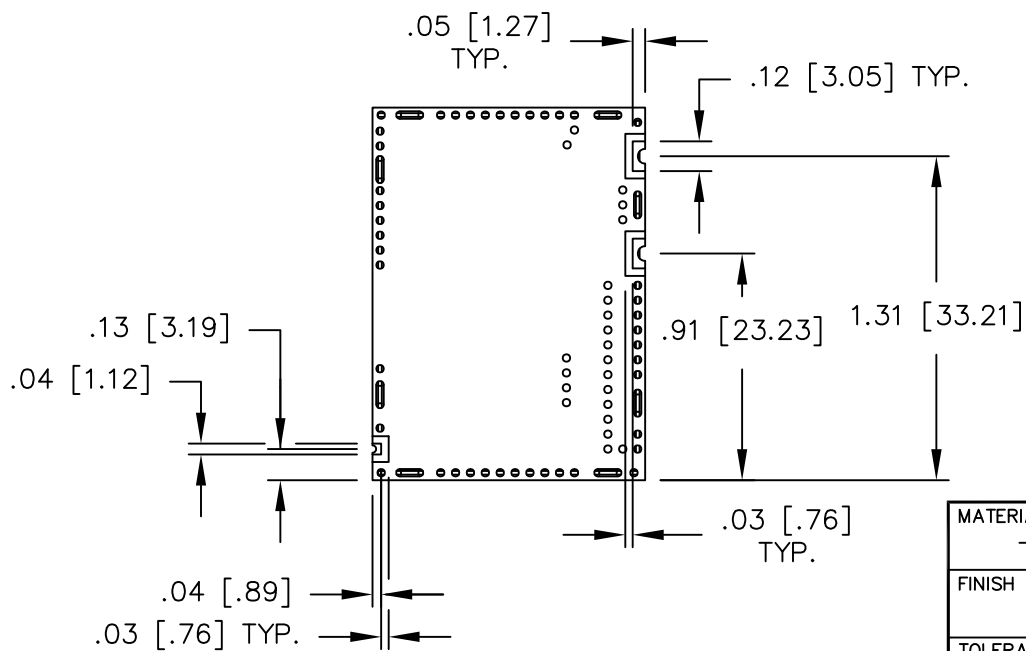


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7255	A	INITIAL RELEASE	DG	8-18
7307	B	SEE DAR	DG	9-18
9101	C	SEE DAR	DG	11-22

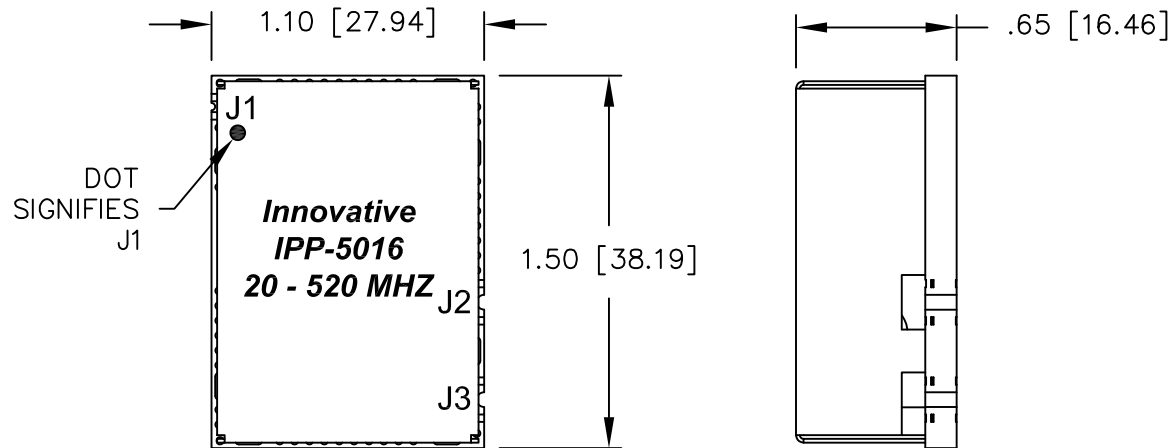

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 – 520 MHz.
INSERTION LOSS:	< 0.45 dB
VSWR:	< 1.30:1
PHASE BALANCE:	180° ±5°
AMPLITUDE BALANCE:	±0.45 dB
POWER:	150 WATT
IMPEDANCE:	J1: 50 OHM J2,J3: 25 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN DG	DATE 7-18	Innovative Power Products		
FINISH IMMERSION TIN	ENG TJD	DATE 7-18			
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	MANUF	DATE	TITLE OUTLINE		
	CAGE CODE: 437R2		2 - WAY BALUN 20 - 520 MHz 150 WATT		
	SHEET 1	OF 1	SCALE 2:1	SIZE B	P/N IPP-5016
					REV. C