


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
9075	A	INITIAL RELEASE	DG	10-22

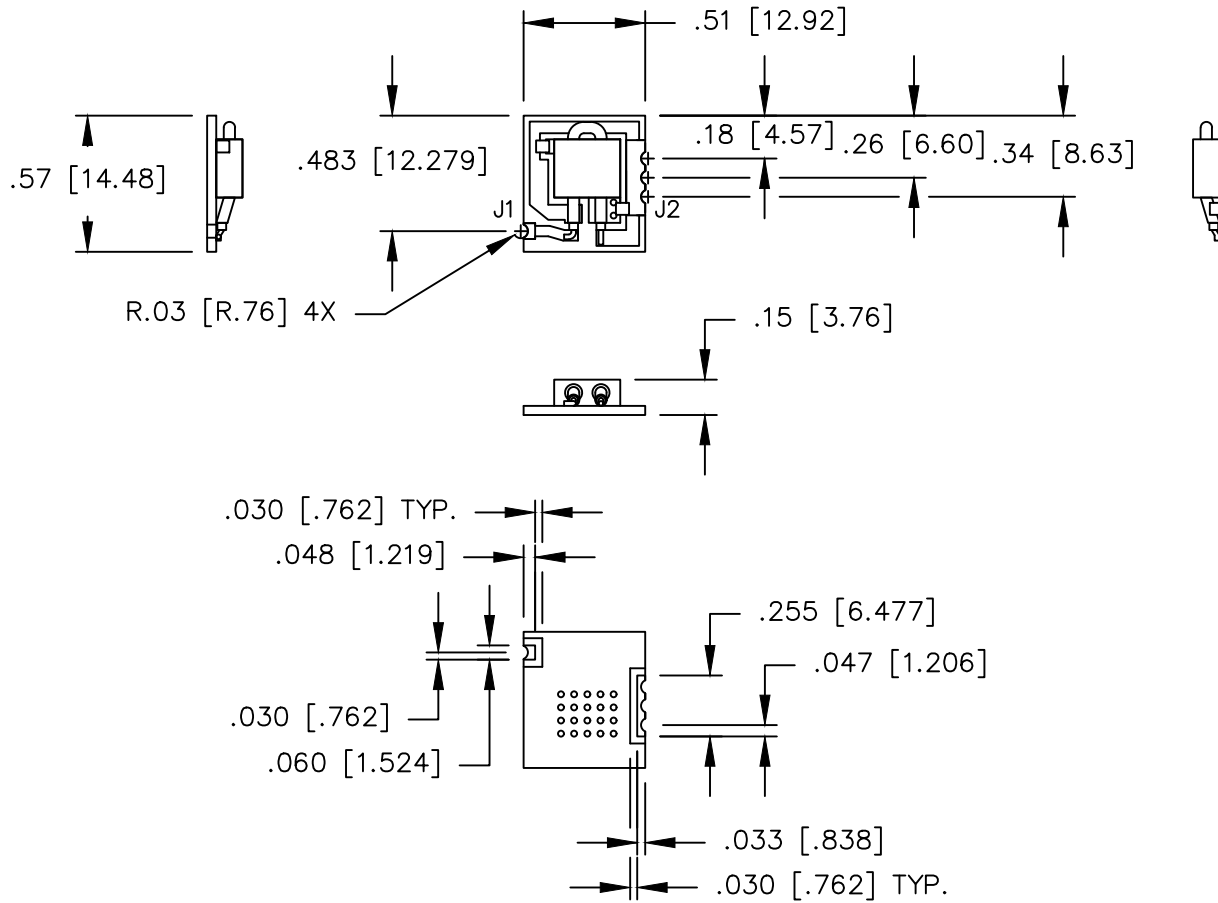

**NOTES:**

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	30 – 1000 MHz.
INSERTION LOSS:	30–50 MHz < 0.75 dB 50–1000 MHz < 0.60 dB
VSWR:	< 1.45:1
POWER:	25 WATT
IMPEDANCE:	J1: 50 OHM J2: 12.5 OHM
TEMPERATURE:	–55°C TO 85°C

MATERIAL	DWN S.Cornell	DATE 8-8-22	<b>Innovative Power Products</b>		
FINISH	ENG DG	DATE 8-22			
IMMERSION TIN	MANUF	DATE	TITLE OUTLINE, SINGLE ENDED TRANSFORMER, 30 - 1000 MHz 25 WATT		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		SIZE B	P/N IPP-5027	REV. A
	SHEET OF 1 1	SCALE 2:1			