


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
9075	A	INITIAL RELEASE	DG	10-22
9316	B	SEE DAR	DG	5-23
9555	C	SEE DAR	DG	1-24

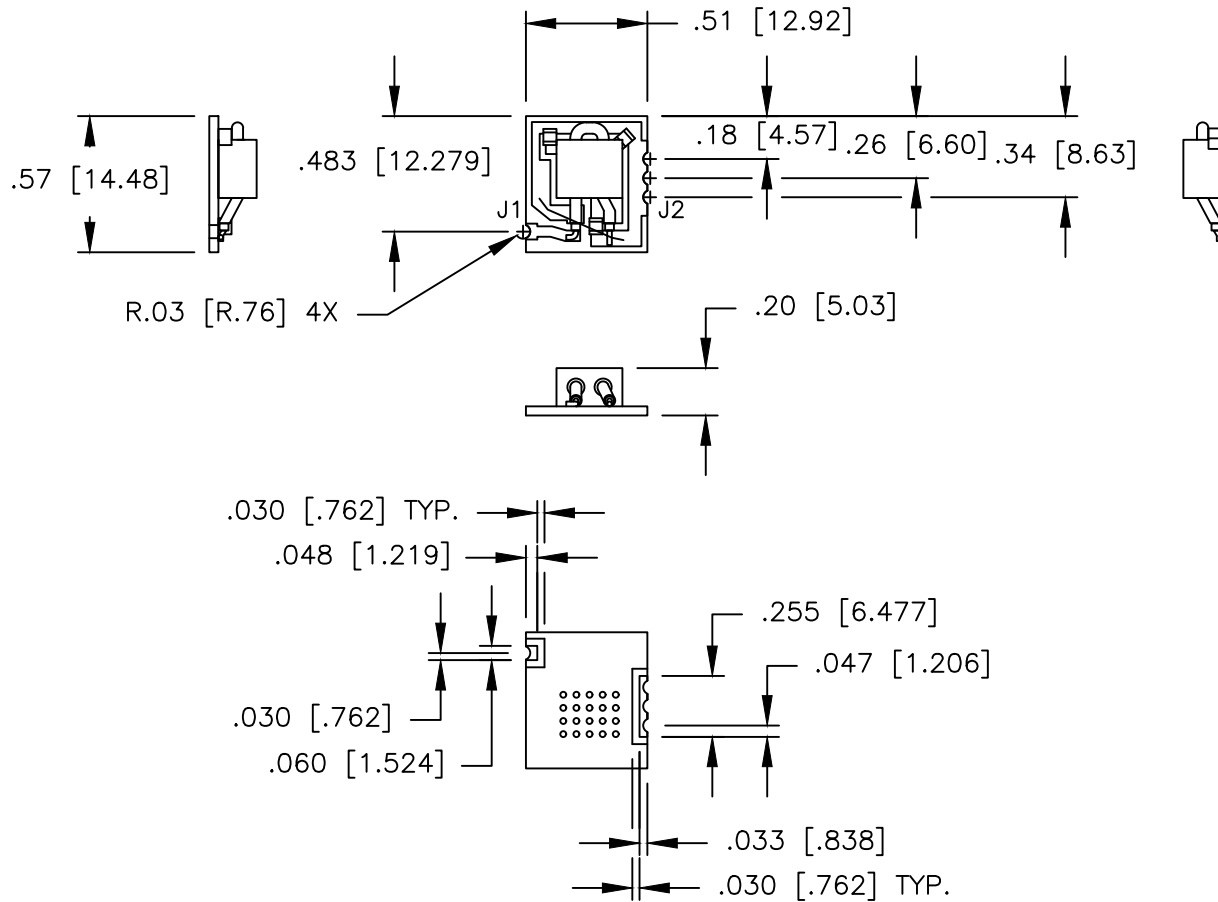

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	30 – 1000 MHz.
INSERTION LOSS:	30-50 MHz < 0.75 dB 50-1000 MHz < 0.60 dB
VSWR:	< 1.45:1
POWER:	25 WATT
IMPEDANCE:	J1: 50 OHM J2: 12.5 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN S.Cornell	DATE	8-8-22	Innovative Power Products		
FINISH	ENG DG	DATE	8-22			
IMMERSION TIN	MANUF	DATE		TITLE OUTLINE, SINGLE ENDED TRANSFORMER, 30 - 1000 MHz 25 WATT		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2	DATE				
	SHEET 1 OF 1	SCALE	2:1	SIZE B	P/N IPP-5027	REV. C