
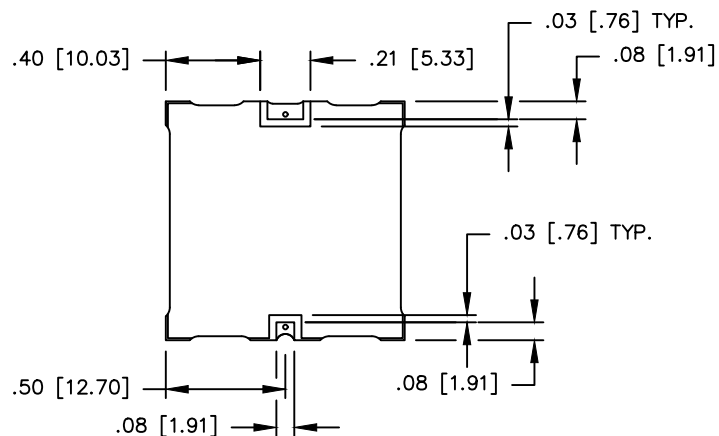


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
10190	A	INITIAL RELEASE	DG	9-25

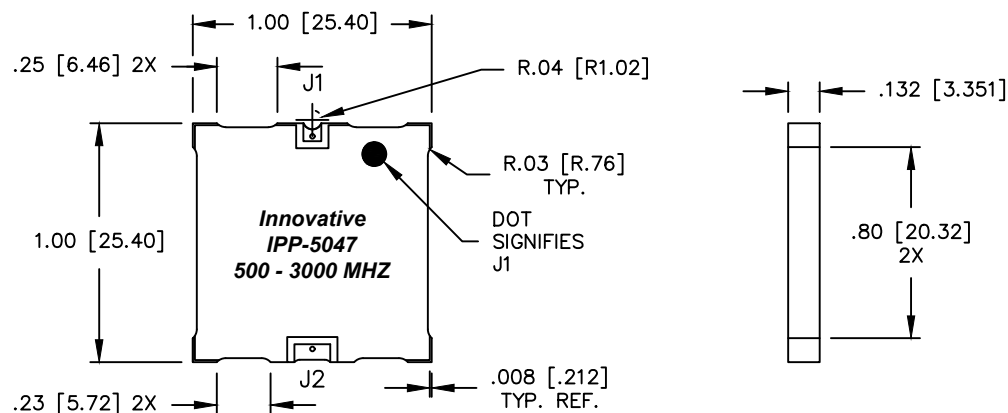

NOTES:

1. DO NOT EXCEED 250° C WHEN INSTALLING.
2. RoHS & REACH COMPLIANT.
3. AVAILABLE IN TAPE AND REEL.
4. DATA AND SPECIFICATIONS APPLY WHEN PART IS MOUNTED IN IPP TEST FIXTURE. TEST FIXTURE CONFIGURATION/FOOTPRINT AVAILABLE UPON REQUEST.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	500 – 3000 MHz.
INSERTION LOSS:	< 0.75 dB
VSWR:	< 1.35:1
POWER:	150 WATT
IMPEDANCE:	J1: 50 OHM J2: 25 OHM
TEMPERATURE:	–55°C TO 85°C

MATERIAL _____	DWN S.Cornell	DATE 8-21-25	<i>Innovative</i> Power® Products		
FINISH ELECTROLESS TIN	ENG DG	DATE 9-25	TITLE OUTLINE, SINGLE ENDED IMPEDANCE TRANSFORMER, 500 - 3000 MHZ 2:1 150 WATT		
	MANUF	DATE			
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		SIZE P/N B IPP-5047 REV. A		
	SHEET 1 OF 1	SCALE 2:1			