



IPP-7026 AMPLITUDE - PHASE BALANCE INPUT

Tr1 S21 Log Mag 800.0mdB/ Ref -3.000dB [RT D&M]

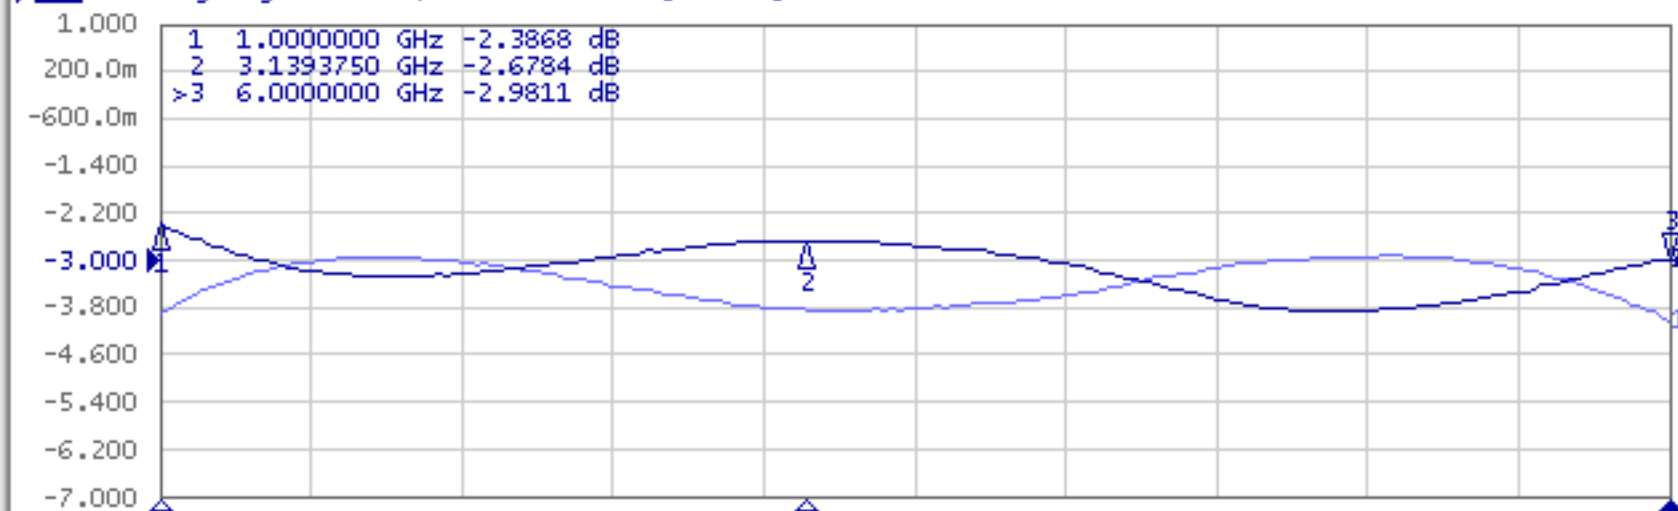

Tr2 S21 Phase 5.000°/ Ref -90.00° [RT D/M]

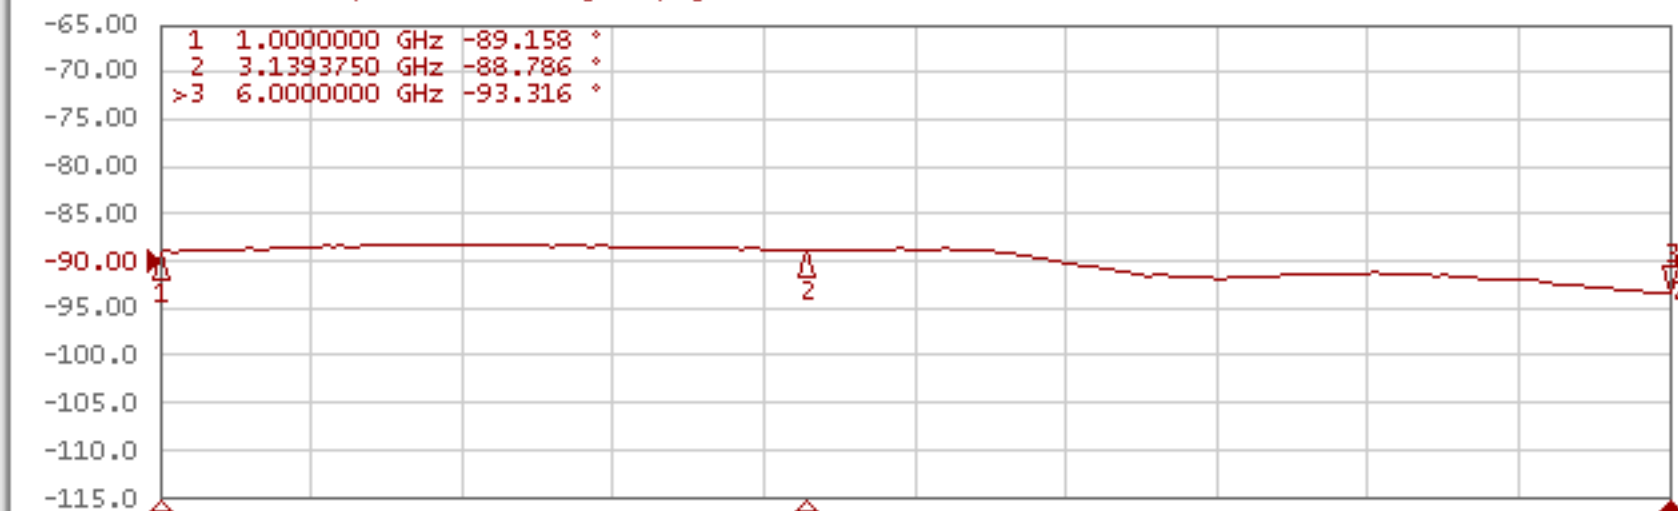


2 Start 1 GHz

IFBW 70 kHz


Stop 6 GHz Cor !

IPP-7026 VSWR - ISOLATION INPUT

▶ Tr1 S11 Log Mag 10.00dB/ Ref -20.00dB [F1]

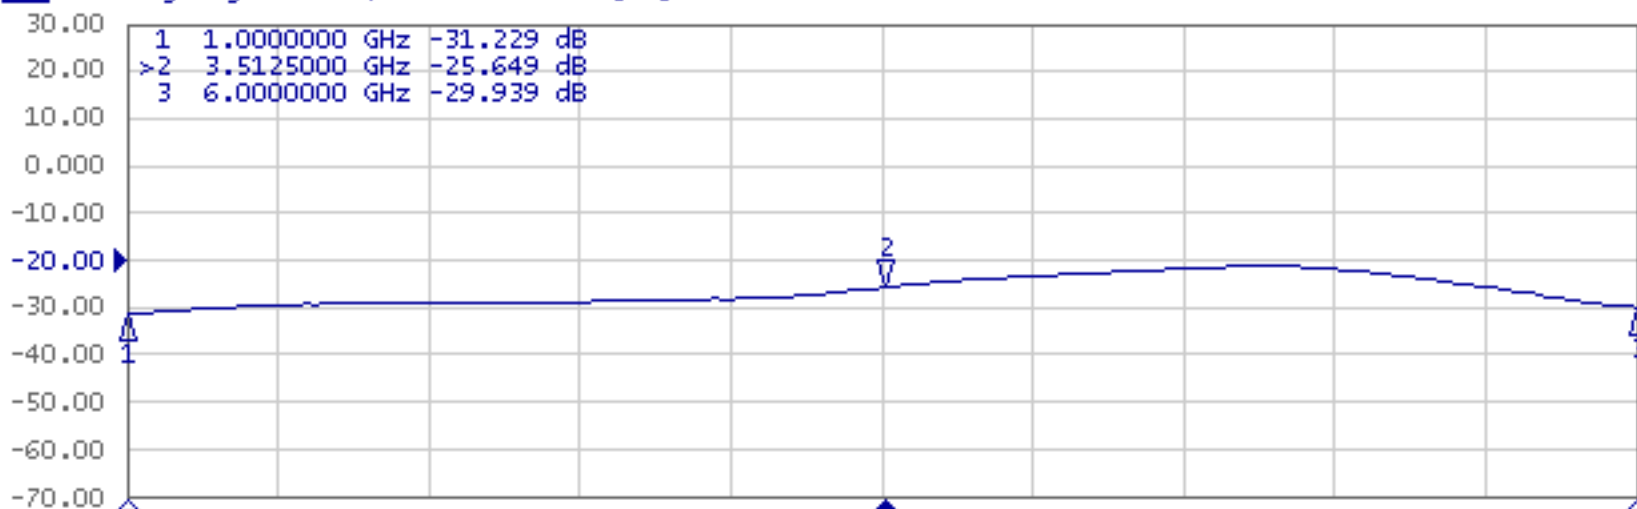

Tr2 S21 Log Mag 10.00dB/ Ref -20.00dB [RT]

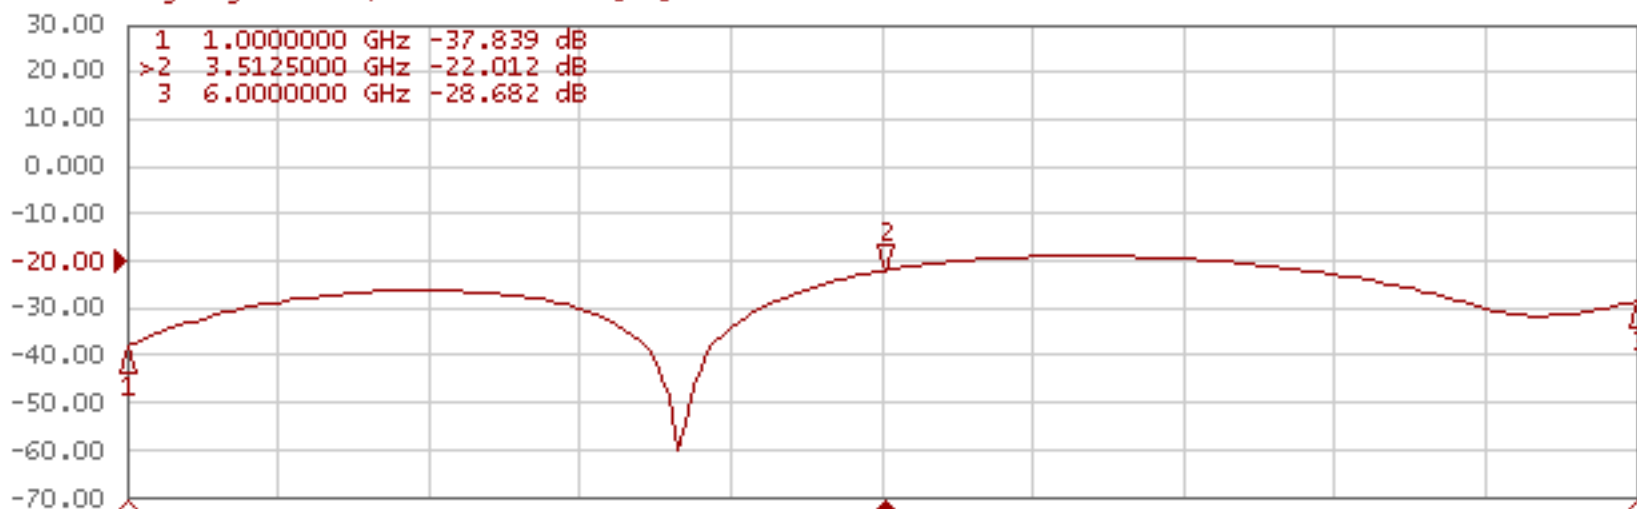

1 Start 1 GHz

IFBW 70 kHz

Stop 6 GHz Cor