



CH1 S11 LOG 10 dB/ REF 0 dB 1:- 29.043 dB 800.000 000 MHz

IPP-7053 VSWR, Amplitude Balance

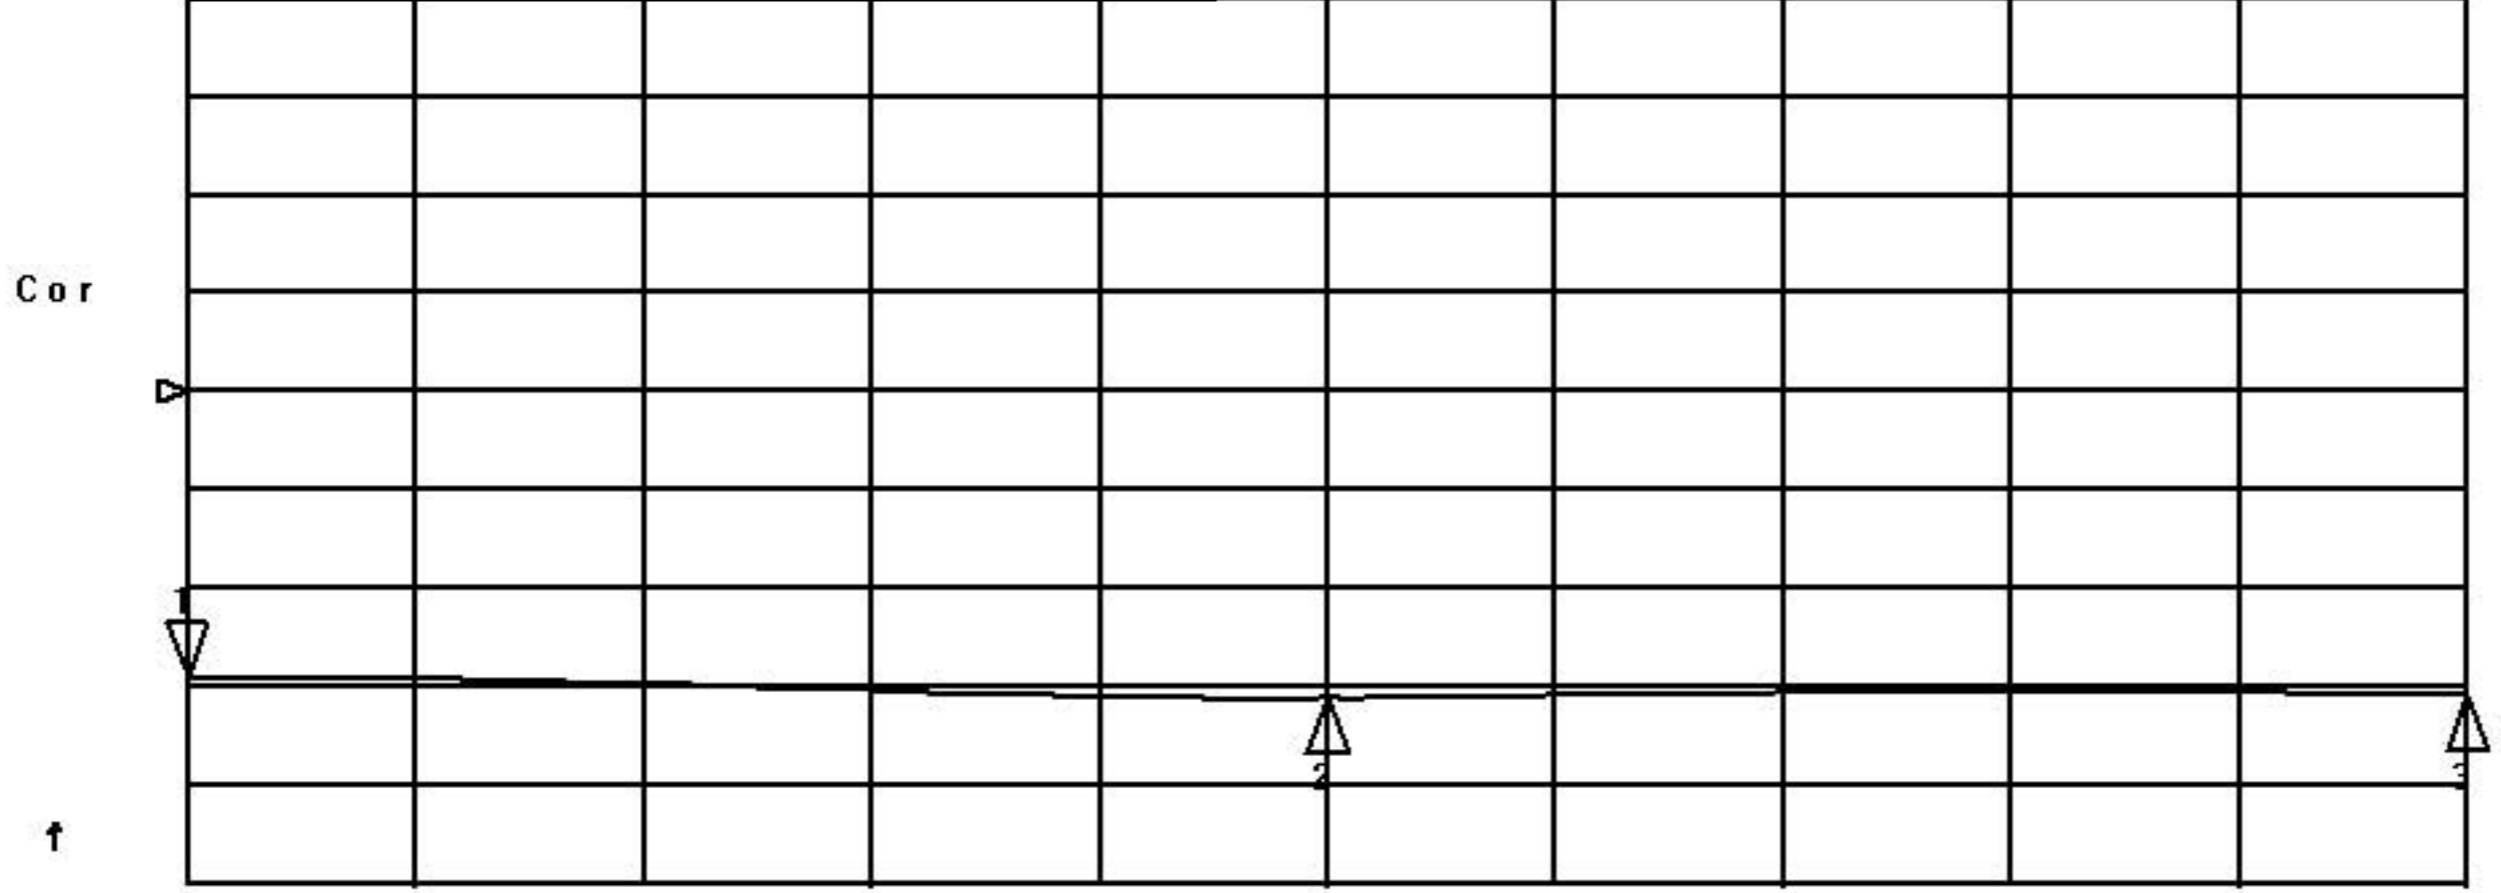

CH1 Markers  
2:- 31.216 dB  
900.000 MHz  
3:- 30.942 dB  
1.00000 GHz

CH2 S21&M LOG .3 dB/ REF -3 dB 1:- 3.1017 dB 800.000 000 MHz

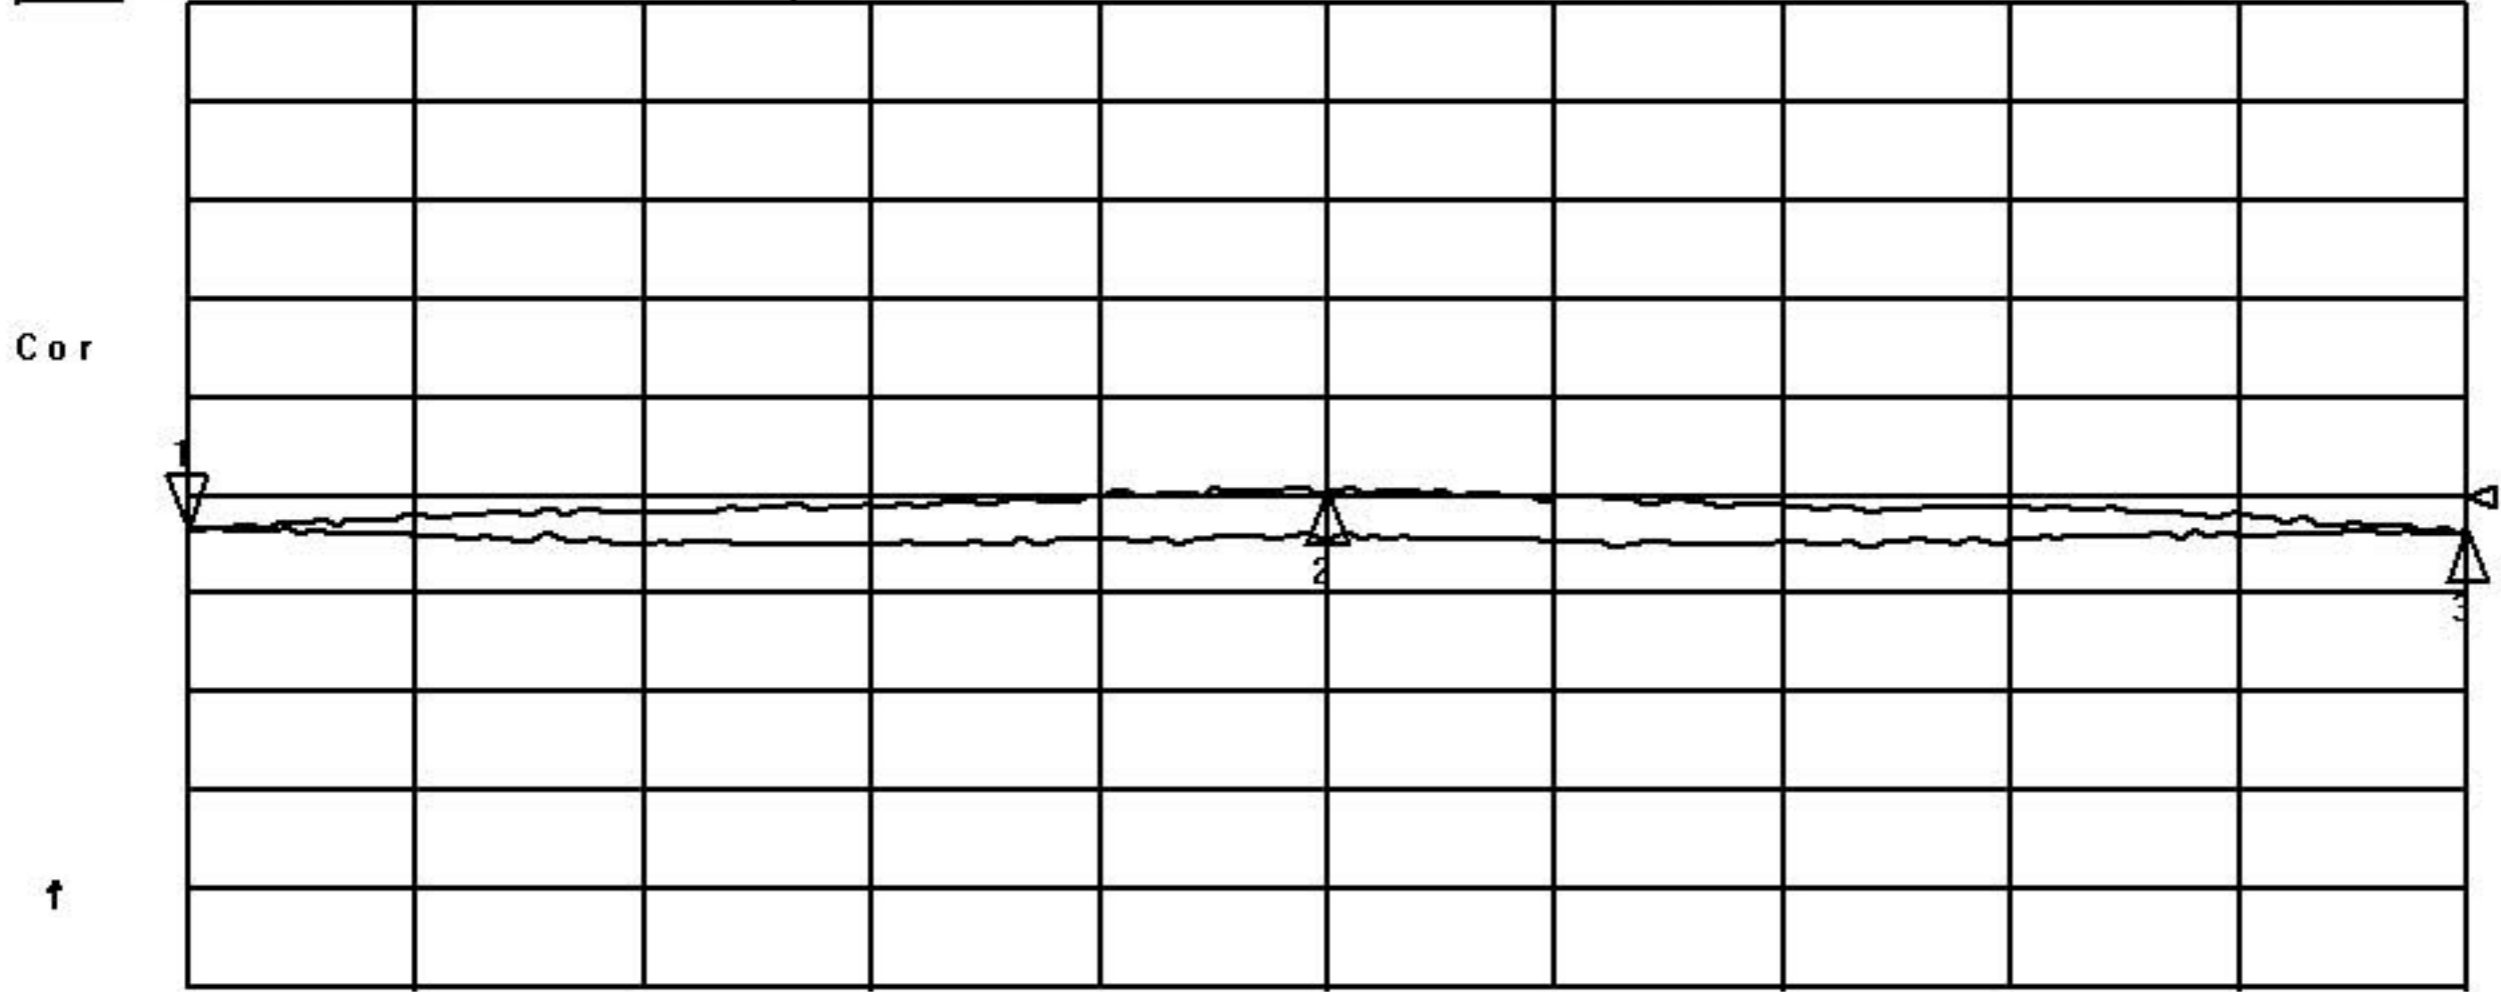

CH2 Markers  
2:- 2.9878 dB  
900.000 MHz  
3:- 3.1022 dB  
1.00000 GHz

START 800.000 000 MHz STOP 1 000.000 000 MHz

CH1 MEM LOG 10 dB/ REF 0 dB 1:- 25.188 dB 800.000 000 MHz

IPP-7053 Isolation, Phase Balance

Cor

f

CH1 Markers

2:- 25.916 dB  
900.000 MHz

3:- 26.628 dB  
1.00000 GHz

CH2 S21/M PHA 5 °/ REF -90 ° 1:- 89.469 ° 800.000 000 MHz

Cor

f

CH2 Markers

2:- 89.537 °  
900.000 MHz

3:- 89.736 °  
1.00000 GHz

START 800.000 000 MHz

STOP 1 000.000 000 MHz