



CH1 MEM LOG 10 dB/ REF 0 dB 1:- 31.912 dB 225.000 000 MHz

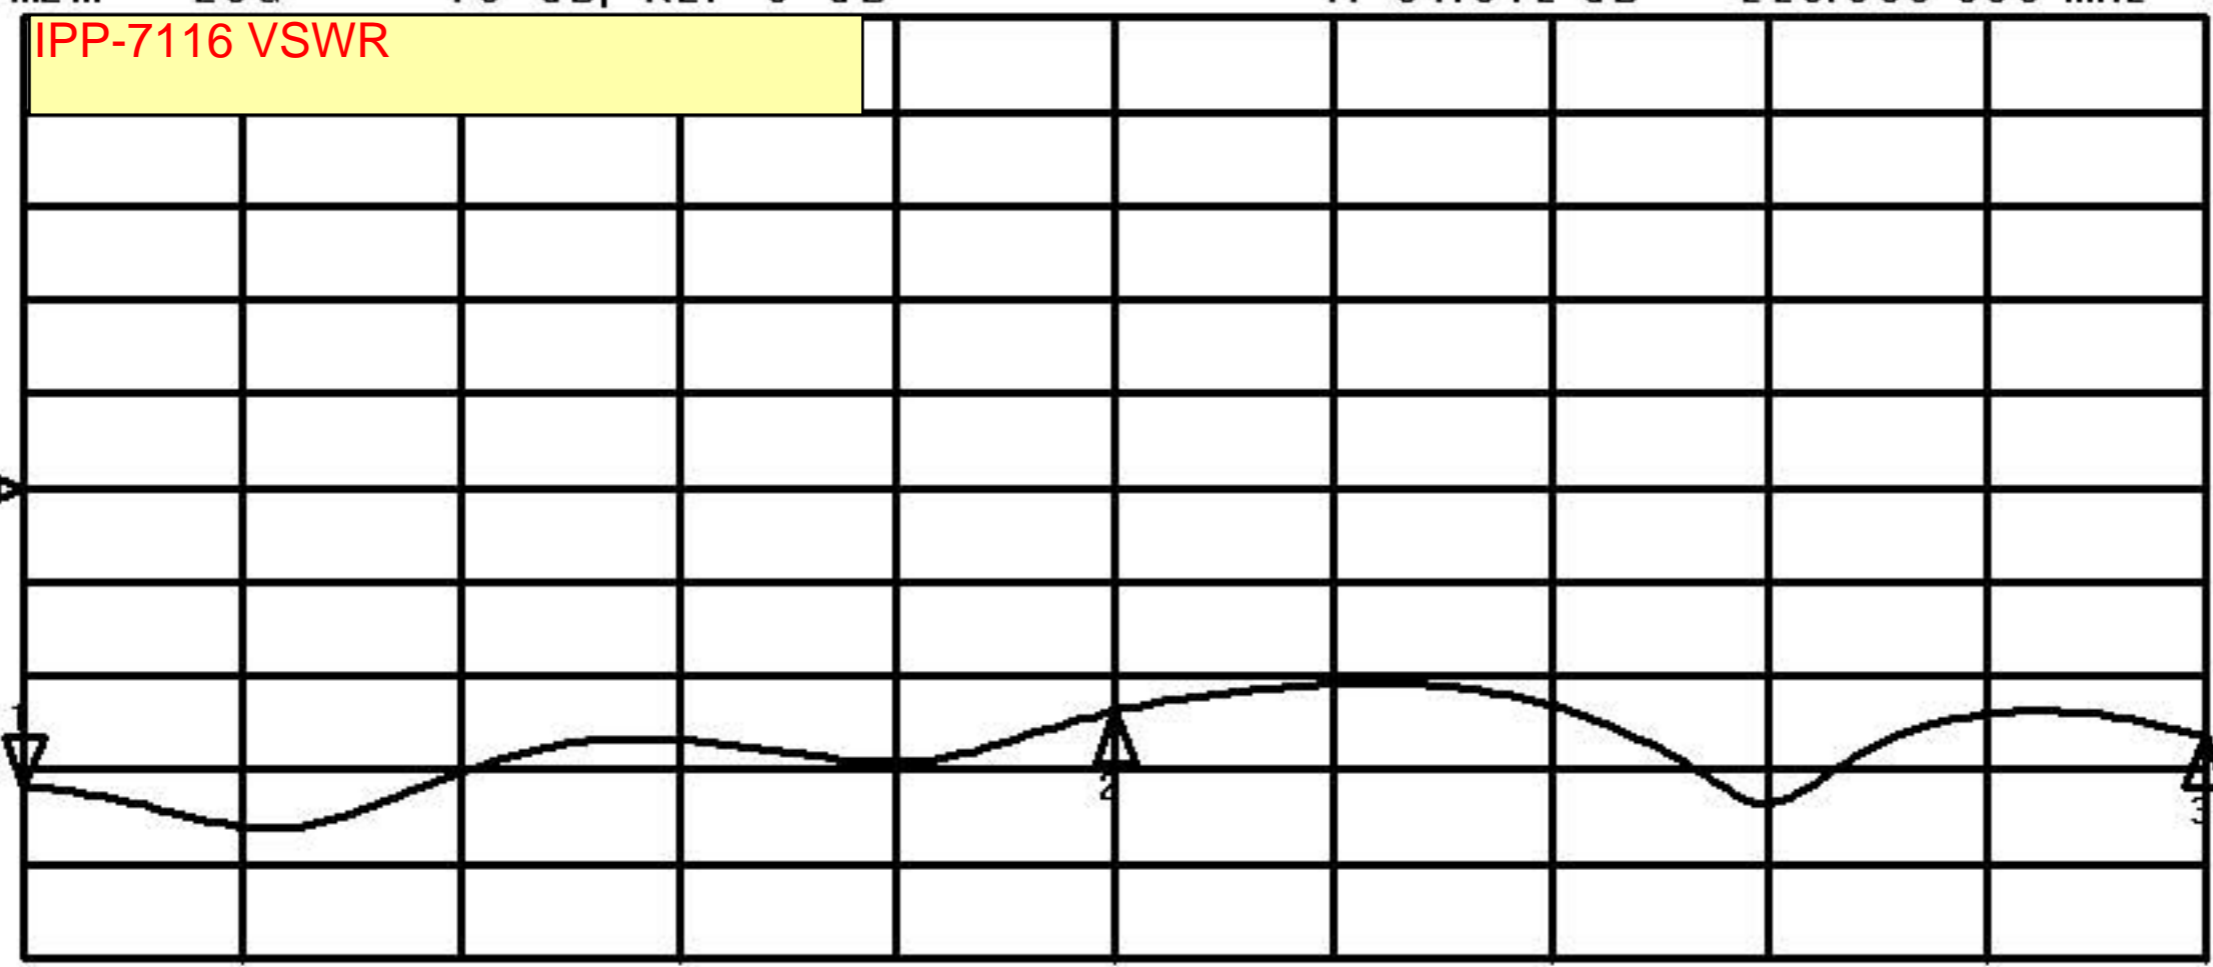

CH1 Markers
2:- 23.721 dB
1.11250 GHz
3:- 26.332 dB
2.00000 GHz

CH2 S21&M LOG 1 dB/ REF -3 dB 1:- 2.5592 dB 225.000 000 MHz

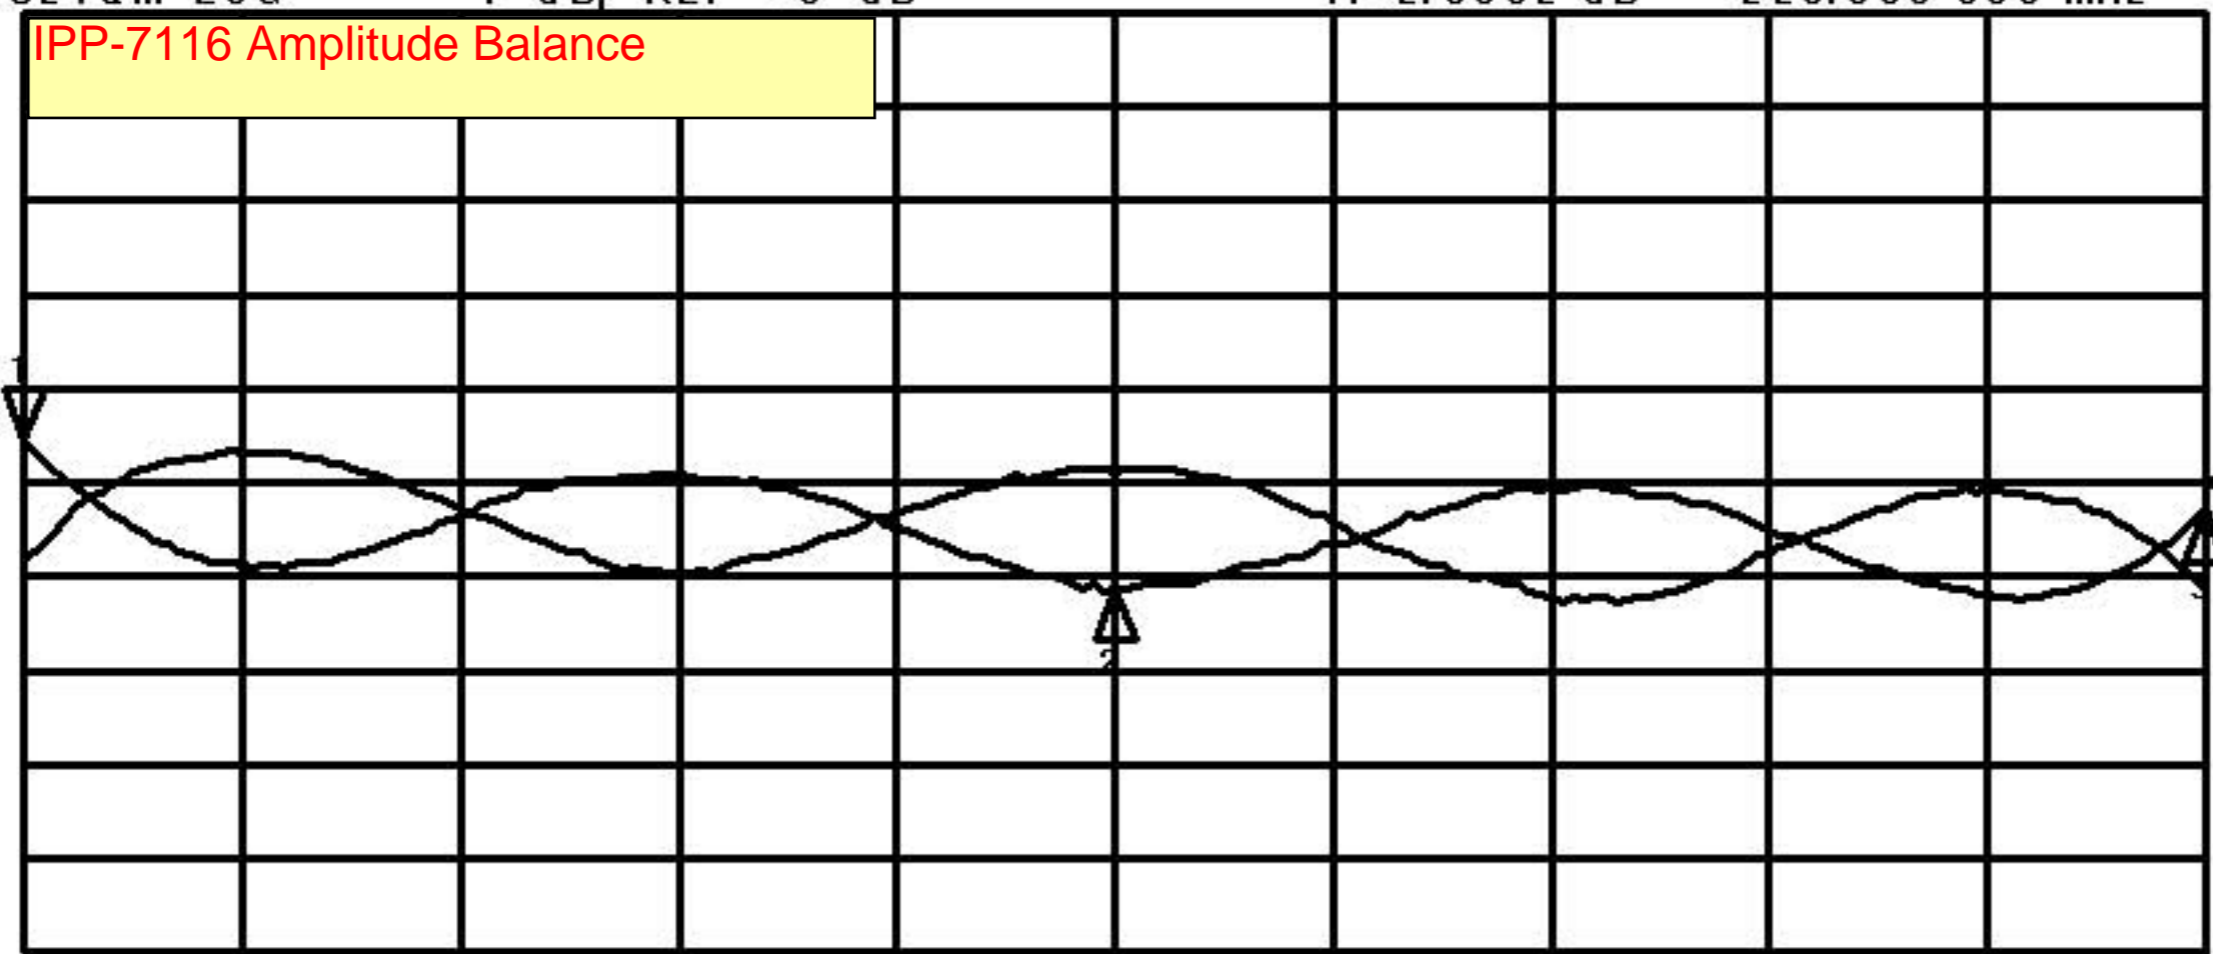


CH2 Markers
2:- 4.1373 dB
1.11250 GHz
3:- 3.2950 dB
2.00000 GHz

START 225.000 000 MHz STOP 2 000.000 000 MHz

CH1 MEM LOG 10 dB/ REF 0 dB 1:-28.586 dB 225.000 000 MHz


IPP-7116 Isolation

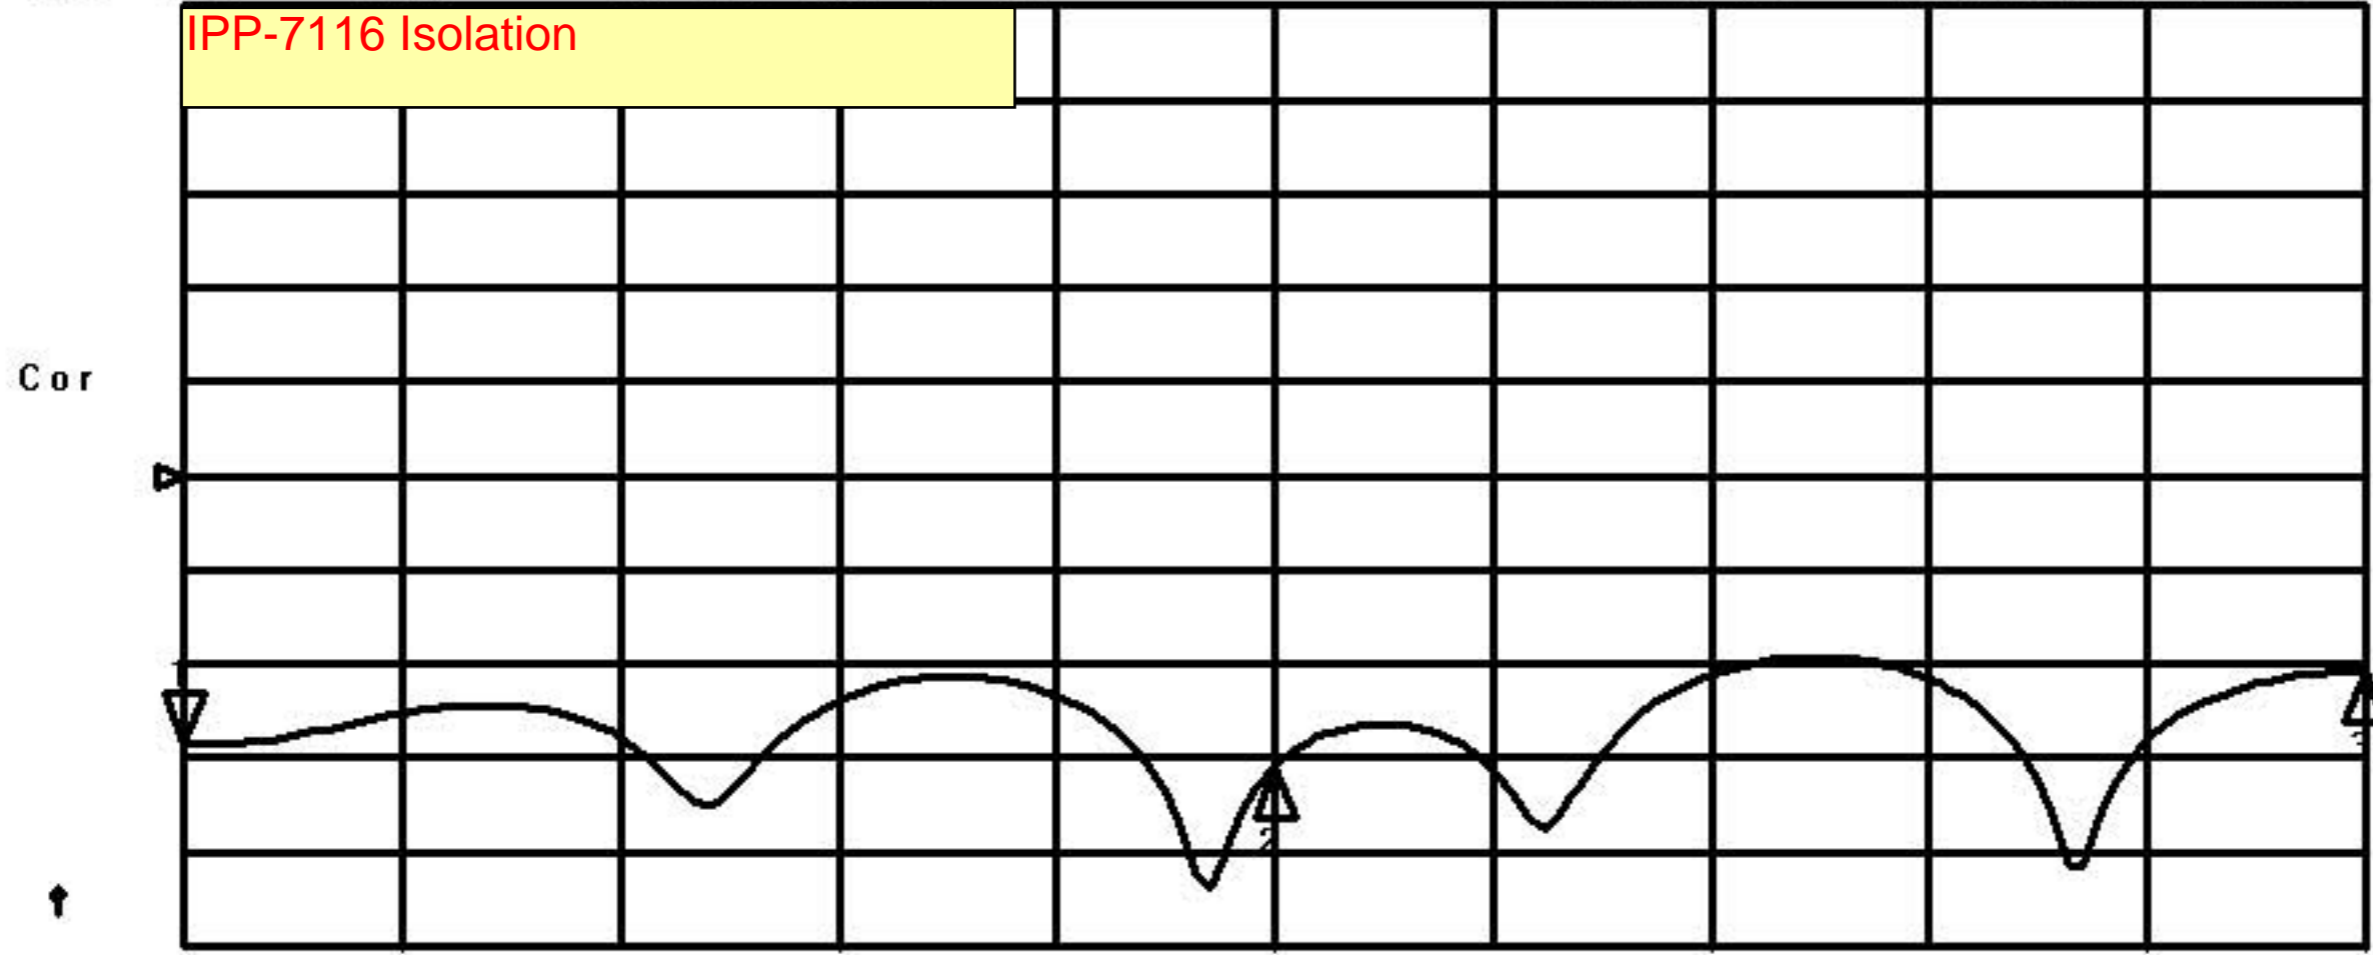

CH1 Markers
2:- 30.827 dB
1.11250 GHz
3:- 20.705 dB
2.00000 GHz

CH2 S21/ M PHA 5 / REF -90 1:-89.874 225.000 000 MHz

IPP-7116 Phase Balance

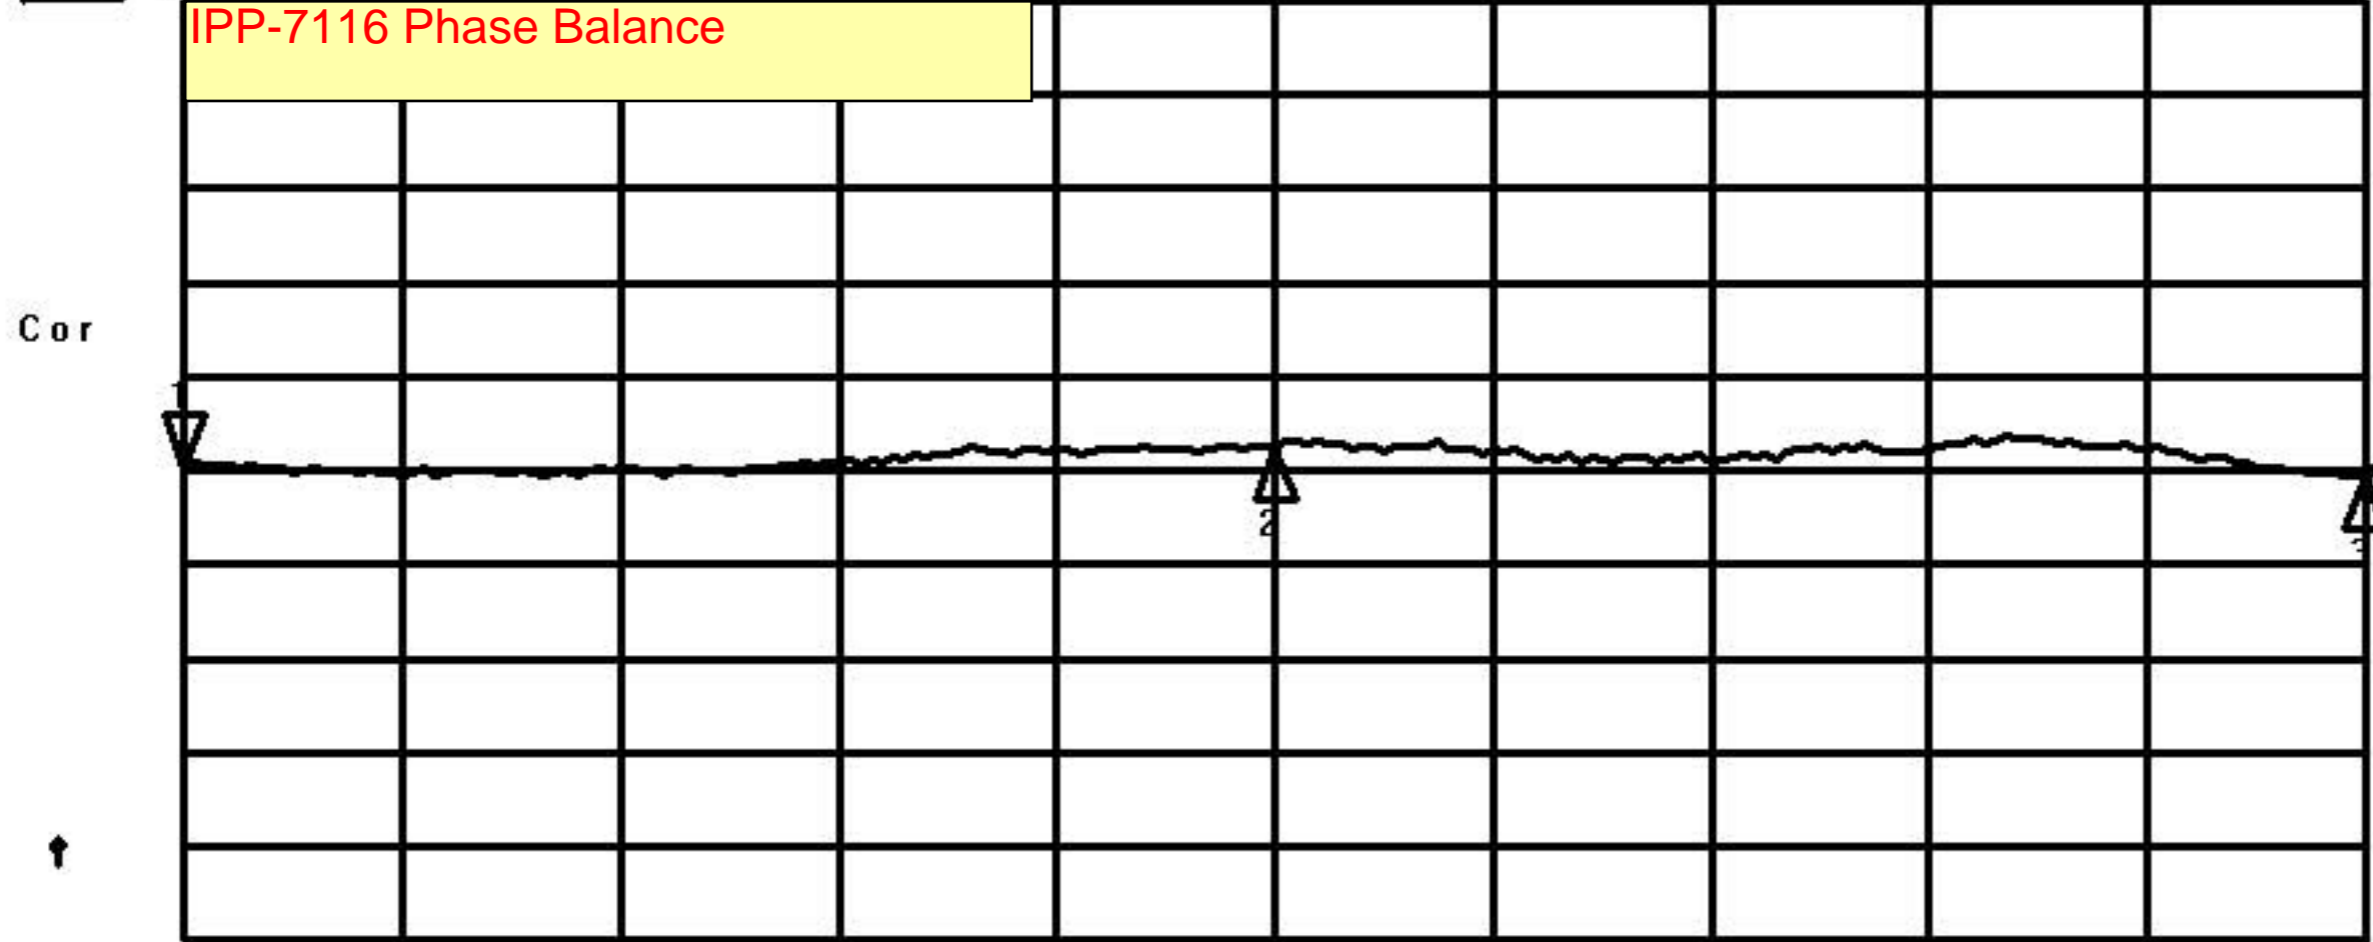

CH2 Markers
2:- 88.840
1.11250 GHz
3:- 90.338
2.00000 GHz

START 225.000 000 MHz STOP 2 000.000 000 MHz