


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3014	A	INITIAL RELEASE	DG	3-11
3398	B	SEE DAR	TJD	11-11
4454	C	SEE DAR	DG	7-13

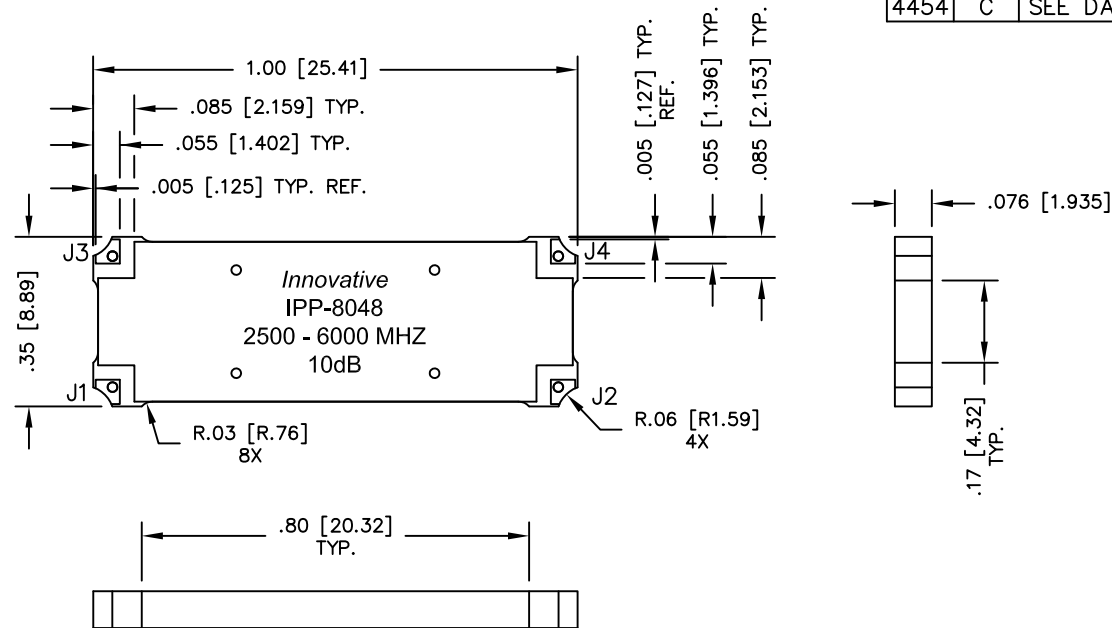

FINISH	
P/N	TYPE
IPP-8048	TIN/LEAD
IPP-8048RT	RoHS MATTE TIN
IPP-8048RG	RoHS NICKEL GOLD

**NOTES:**

1. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.
2. PARTS WITH RoHS MATTE TIN AND RoHS NICKEL GOLD FINISHES ARE RoHS COMPLIANT.
3. AVAILABLE IN TAPE AND REEL. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY: 2500 - 6000 MHz.  
 INSERTION LOSS: <0.40 dB  
 MAIN LINE VSWR: <1.35:1  
 COUPLING: 10dB ±0.5 dB  
 DIRECTIVITY: >15 dB  
 COUPLED FLATNESS: <±0.5 dB  
 POWER: 100 WATT  
 TEMPERATURE: -55°C TO 85°C

PORT CONFIGURATION			
INPUT	OUTPUT	FORWARD COUPLED	REFLECTED COUPLED
J1	J2	J3	J4 ADD 50Ω TERMINATION
J1	J2	J3 ADD 50Ω TERMINATION	J4
J2	J1	J4	J3 ADD 50Ω TERMINATION
J2	J1	J4 ADD 50Ω TERMINATION	J3

MATERIAL	DWN DG	DATE 2-11				
FINISH	ENG TJD	DATE 2-11				
SEE FINISH CHART	MANUF	DATE	TITLE OUTLINE, SMD COUPLER			
TOLERANCE	CAGE CODE: 437R2		BI-DIRECTIONAL, 2500 - 6000 MHz. 10dB 100W			
IN [MM]	SHEET 1	OF 1	SCALE 4:1	SIZE B	P/N IPP-8048	REV. C