


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
4450	B	SEE DAR	DG	7-13
4652	C	SEE DAR	DG	10-13
6646	D	SEE DAR	DG	4-17

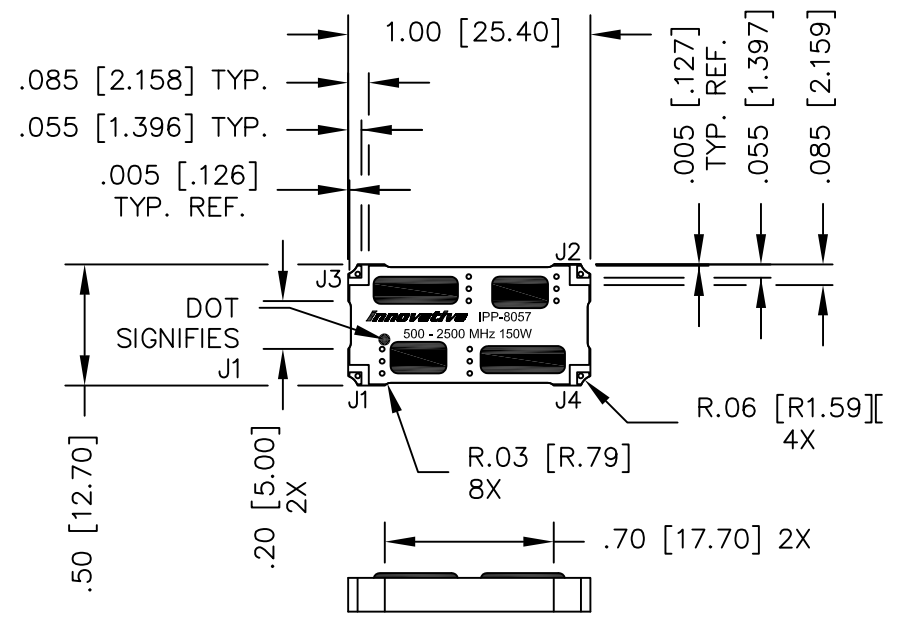

- NOTES:**
1. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.
  2. AVAILABLE IN TAPE AND REEL. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.
  3. DO NOT EXCEED 220°C WHEN INSTALLING COUPLER.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	500 - 2500 MHz.
INSERTION LOSS:	<0.25 dB
MAIN LINE VSWR:	<1.25:1
DIRECTIVITY:	>20dB
COUPLING:	33±1.5dB
COUPLED FLATNESS:	±1.0dB
POWER:	150 WATT
TEMPERATURE:	-55°C TO 85°C

FINISH	
P/N	TYPE
IPP-8057	TIN/LEAD

PORT CONFIGURATION			
INPUT	OUTPUT	FORWARD COUPLED	REFLECTED COUPLED
J1	J2	J3	J4
J2	J1	J4	J3

MATERIAL	DWN DG	DATE 11-11	<b>Innovative Power Products</b>		
FINISH SEE FINISH CHART	ENG TJD	DATE 11-11			
TOLERANCE	CAGE CODE: 437R2		TITLE OUTLINE		
IN [MM]	SHEET 1	OF 1	SCALE 2:1	SMD COUPLER, DDC, 500 - 2500 MHz. 150W	
.XX ±.02 [.50]			SIZE B	P/N IPP-8057*	REV. D
.XXX ±.010 [.254]					
ANG. ±1/2°					