
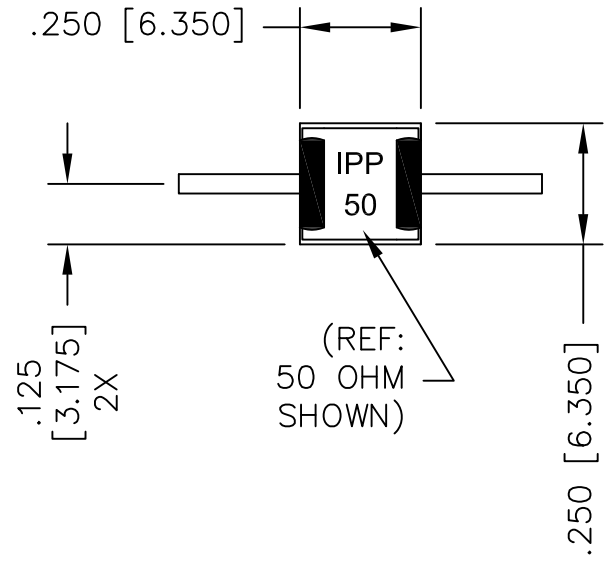


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7952	B	ADDED 120 OHM VALUE	DG	12-19
8395	C	SEE DAR	DG	10-20
8610	D	SEE DAR	DG	4-21

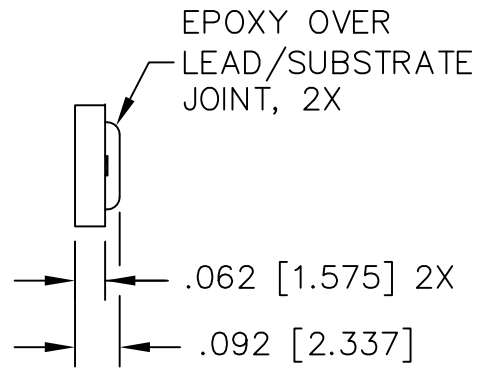


NOTES:

1. LEAD MATERIAL: 99.99% PURE SILVER, .040 [1.016] WIDE x .005 [.127] THICK x .250 [6.350] MIN. LONG.
2. LEAD FINISH: GOLD PLATE PER MIL-G-45204, TYPE 3, GRADE A, 20 MICRO-INCHES MAX.
3. SUBSTRATE MATERIAL: AIN
4. LEAD(S) WELDED TO SUBSTRATE.
5. THICK FILM.
6. RoHS COMPLIANT.
7. BACKSIDE METALIZATION: THICK FILM PALLADIUM SILVER.

ELECTRICAL SPECIFICATIONS

INPUT POWER: 100 WATT
CAPACITANCE: 1.56 pF

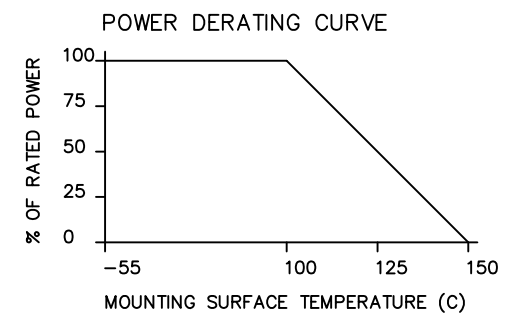

PART NO.	VALUE	TOLERANCE
IPP-RN103-50	50 OHMS	+/- 5%
IPP-RN103-100	100 OHMS	+/- 5%

MATERIAL SEE NOTES	DWN S.Cornell	DATE 2-5-19	Innovative Power Products			
FINISH SEE NOTES	ENG DG	DATE 2-19				
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	CAGE CODE: 437R2		TITLE RESISTOR, AIN, 100 WATT, FLANGELESS			
	SHEET 1	OF 1	SCALE 4:1	SIZE B	P/N IPP-RN103-XXX	REV. D