
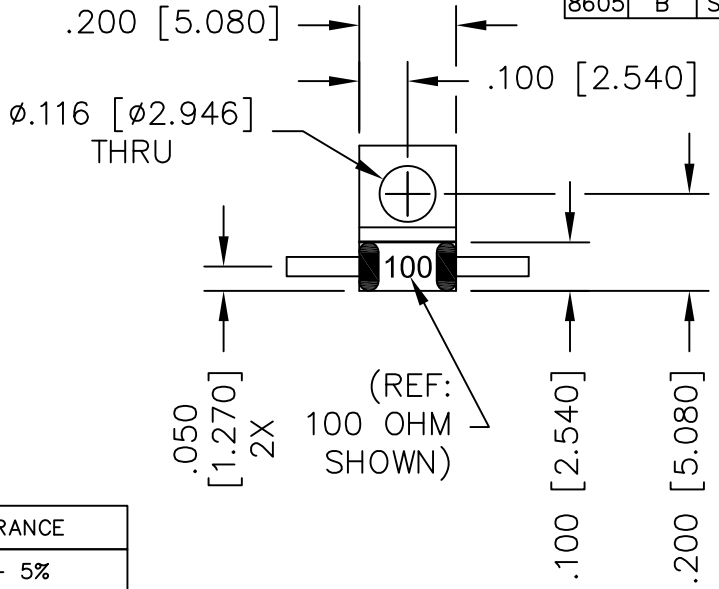


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7694	A	INITIAL RELEASE	DG	6-19
8605	B	SEE DAR	DG	4-21

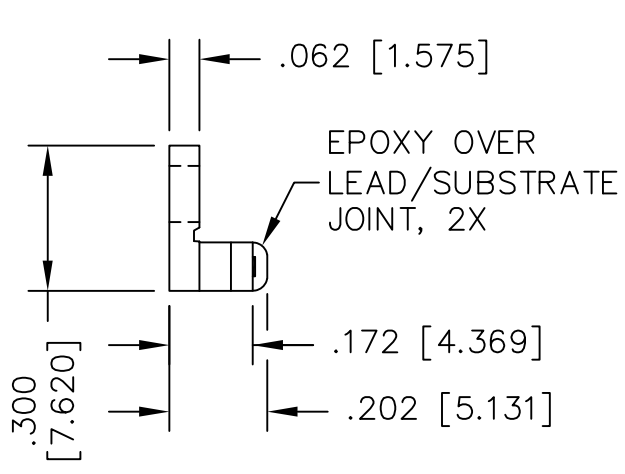


NOTES:

1. LEAD MATERIAL: 99.99% PURE SILVER, .040 [1.016] WIDE x .005 [.127] THICK x .150 [3.810] MIN. LONG.
2. LEAD FINISH: GOLD PLATE PER MIL-G-45204, TYPE 3, GRADE A, 20 MICRO-INCHES MAX.
3. SUBSTRATE MATERIAL: AIN FLANGE MATERIAL: COPPER PLATING: NICKEL
4. LEAD(S) WELDED TO SUBSTRATE.
5. THICK FILM.
6. RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

INPUT POWER: 30 WATT
CAPACITANCE: 0.4 pF

PART NO.	VALUE	TOLERANCE
IPP-RN201LC-25	25 OHMS	+/- 5%
IPP-RN201LC-50	50 OHMS	+/- 5%
IPP-RN201LC-75	75 OHMS	+/- 5%
IPP-RN201LC-100	100 OHMS	+/- 5%
IPP-RN201LC-120	120 OHMS	+/- 5%
IPP-RN201LC-150	150 OHMS	+/- 5%
IPP-RN201LC-200	200 OHMS	+/- 5%
IPP-RN201LC-300	300 OHMS	+/- 5%
IPP-RN201LC-430	430 OHMS	+/- 5%

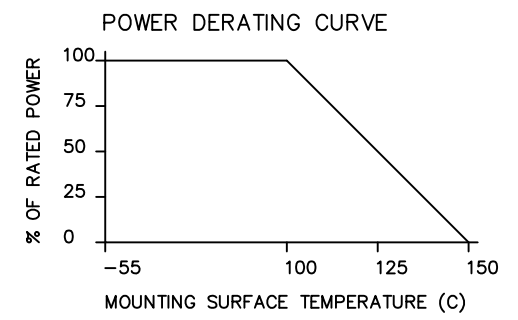

MATERIAL SEE NOTES	DWN S.Cornell ENG DG	DATE 2-1-19 DATE 2-19			
FINISH SEE NOTES	MANUF	DATE			TITLE RESISTOR, AIN, LOW C, 30 WATT, HALF FLANGE
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	CAGE CODE: 437R2		SIZE B	P/N IPP-RN201LC-XXX	REV. B
			SHEET OF 1 1	SCALE 4:1	