
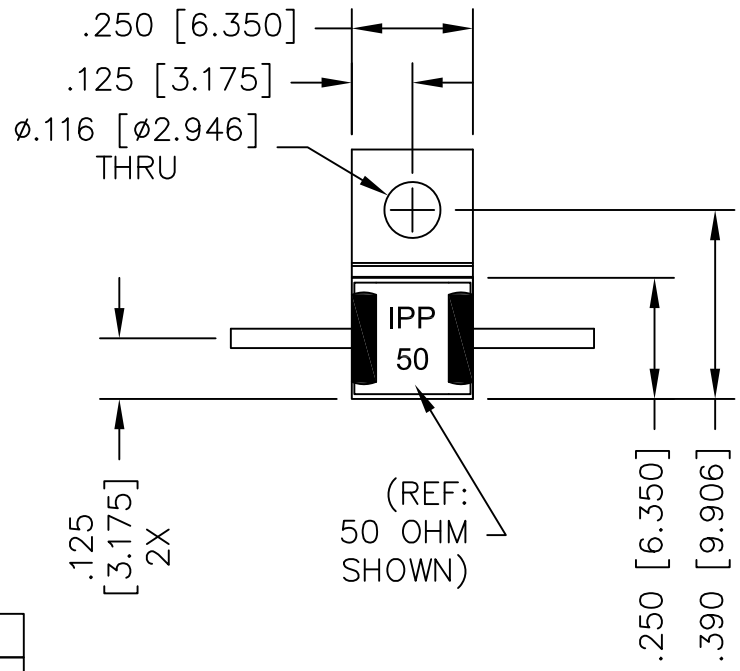


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
8618	D	SEE DAR	DG	5-21
8780	E	SEE DAR	DG	9-21
8954	F	SEE DAR	DG	4-22

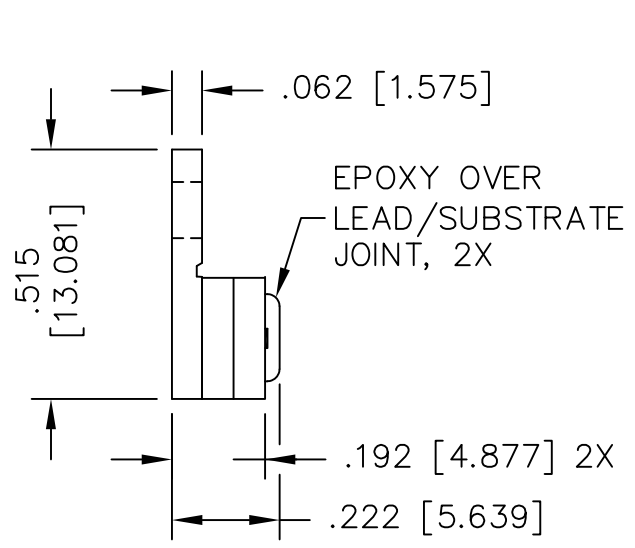


NOTES:

- LEAD MATERIAL: 99.99% PURE SILVER, .040 [1.016] WIDE x .005 [.127] THICK x .250 [6.350] MIN. LONG.
- LEAD FINISH: GOLD PLATE PER MIL-G-45204, TYPE 3, GRADE A, 20 MICRO-INCHES MAX.
- SUBSTRATE MATERIAL: AIN FLANGE MATERIAL: COPPER PLATING: NICKEL
- LEAD(S) WELDED TO SUBSTRATE.
- THICK FILM.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

INPUT POWER: 65 WATT
 CAPACITANCE: 0.6 pF

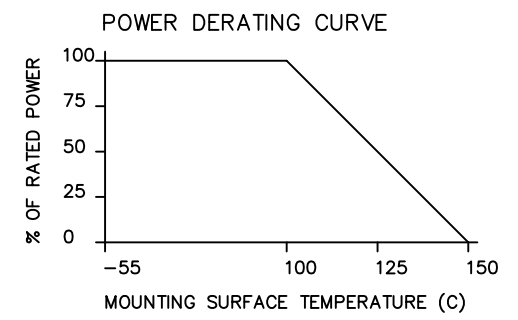

PART NO.	VALUE	TOLERANCE
IPP-RN203LC-25	25 OHMS	+/- 5%
IPP-RN203LC-50	50 OHMS	+/- 5%
IPP-RN203LC-100	100 OHMS	+/- 5%
IPP-RN203LC-150	150 OHMS	+/- 5%
IPP-RN203LC-200	200 OHMS	+/- 5%
IPP-RN203LC-300	300 OHMS	+/- 5%

MATERIAL SEE NOTES	DWN S.Cornell ENG DG	DATE 2-6-19 DATE 2-19			
FINISH SEE NOTES	MANUF	DATE			
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	CAGE CODE: 437R2		SIZE B	P/N IPP-RN203LC-XXX	REV. F
	SHEET 1	OF 1	SCALE 4:1		