



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
6268	A	INITIAL RELEASE	TJD	6-16

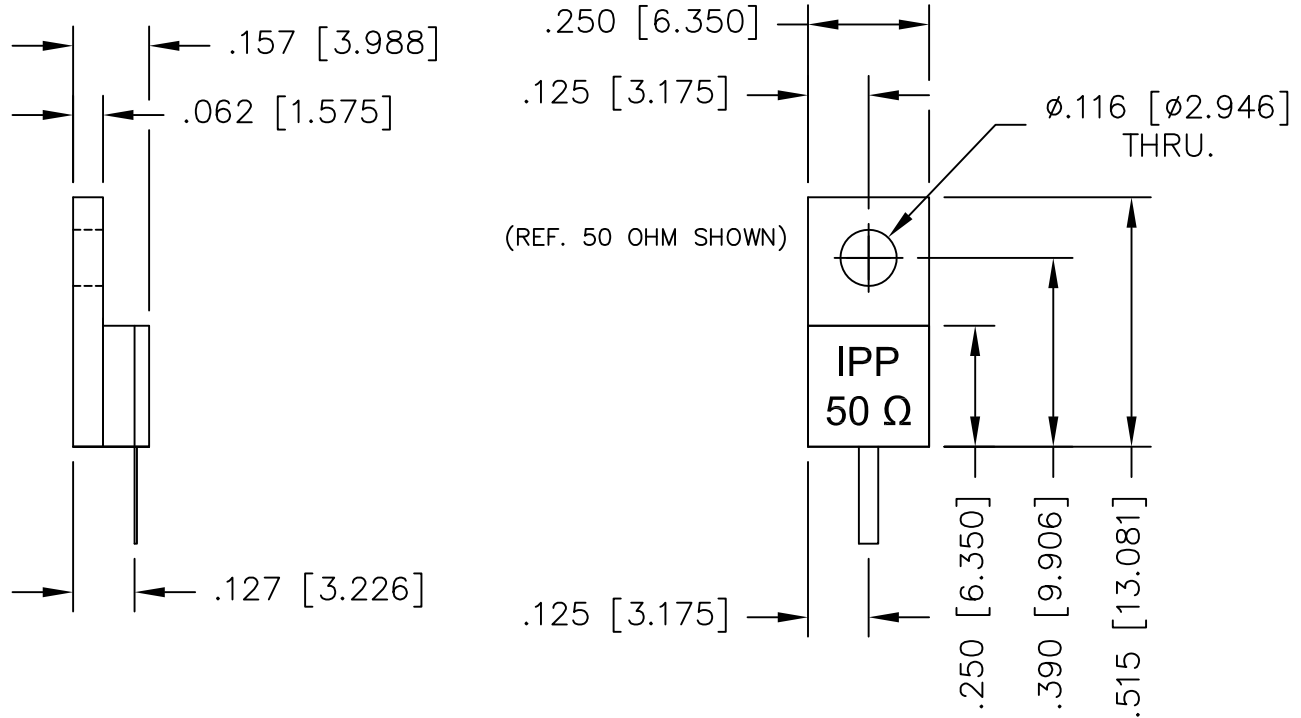

- NOTES:**
- LEAD MATERIAL: 99.99% PURE SILVER, .040 [1.016] WIDE x .005 [0.127] THICK x .150 [3.810] MIN. LONG.
 - SUBSTRATE MATERIAL: BeO
COVER MATERIAL: AL₂O₃
 - FLANGE MATERIAL: COPPER
PLATING: NICKEL
 - LEAD(S) WELDED TO SUBSTRATE.
 - RoHS COMPLIANT.

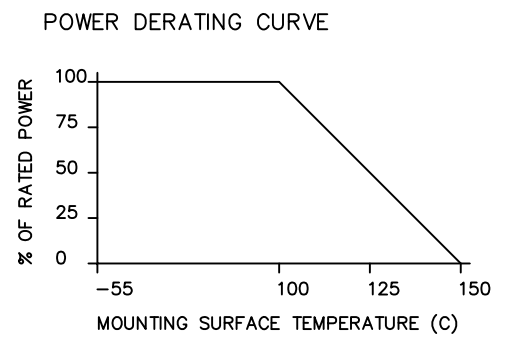

ELECTRICAL SPECIFICATIONS				
PART NO.	VALUE	INPUT POWER	FREQUENCY	VSWR
IPP-TB226C-50	50 OHMS \pm 5%	100 WATT	DC-5.0 GHz	<1.10:1 DC-4.2 GHz <1.25:1 DC-5.0 GHz
IPP-TB226C-100	100 OHMS \pm 5%	100 WATT	DC-2.3 GHz	2 \pm 0.2:1

MATERIAL	[2] [3]	DWN	DG	DATE	6-16	
FINISH	[3]	ENG	TJD	DATE	6-16	
TOLERANCE	.XX \pm .02 [.50] IN [MM] .XXX \pm .010 [.254]	MANUF		DATE		TITLE
		CAGE CODE: 437R2		SHEET OF 1 1		TERMINATION, 100 WATT, FLANGE
		SCALE	4:1	SIZE	B	P/N
				IPP-TB226C-XXX		REV.
						A